

Food Belts

A150FBS-W




Only for Habasit America, Habasit Canada Ltd., Habasit East Asia Ltd. - China, Habasit Nippon Co. Ltd. and Habasit Far East Pte. Ltd.

Applications

Packaging belt, Rice grain elevators

Special features

Oil resistant, Temperature variation resistant

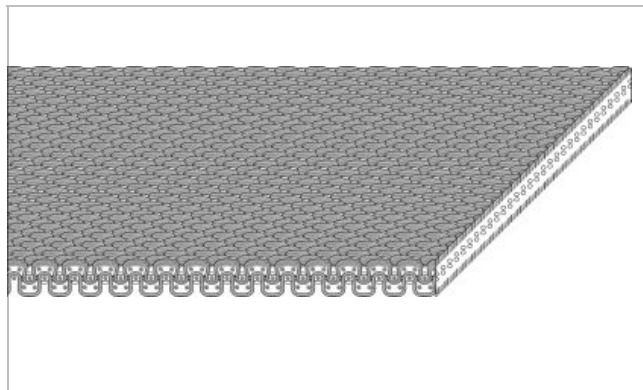

Product Construction / Design	
Conveying side material	Polyester fabric (PET) impregnated with polyvinylchloride (PVC)
Conveying side surface	Fabric
Conveying side property	Non-adhesive
Conveying side color	White
Traction layer (material)	Polyester (PET)
Number of Fabrics	1
Pulley side material	Polyester fabric (PET) impregnated with polyvinylchloride (PVC)
Pulley side surface	Fabric
Pulley side property	Non-adhesive
Pulley side color	White

Product characteristics	
Antistatically equipped	No
Adhesive free joining method	Ja
Flammability	No specific flammability prevention property
Food suitability, FDA conformance	Yes - Check Document of Compliance (DoC) in our Portal
Food suitability, EU conformance	No
Other conformance/approval	Japanese Food Regulation (MHLW Notification No. 370)

FDA, 21 CFR parts/sections 175.300 Resinous and polymeric coatings, 177.1630 Polyethylene phthalate polymers, 178.3297 Colorants for polymers This product meets the relevant requirements laid down in this regulation and is applicable for direct contact with: - dry food (dry solids with the surface containing no free fat or oil, no end test required) as listed in 21 CFR 176.170 (c) table 1, food type VIII Conditions of use D (hot filled or pasteurized below 150 degF) through G (frozen) as listed in 21 CFR 175.300(d) table 2

Technical data			
Thickness of belt	3.3	mm	0.13 <i>tommer</i>
Mass of belt (belt weight)	3.1	kg/m ²	0.635 <i>lb/sqft</i>
Tensile force for 1% elongation (k1% static) per unit of width (Habasit standard SOP3-155)	35	N/mm	200 <i>lbf/in</i>
Tensile force for 1% elongation after relaxation (k1% relaxed) per unit of width (Habasit Standard SOP3-155 / EN ISO 21181)	12	N/mm	69 <i>lbf/in</i>
Min. operating temperature admissible (continuous)	-23	°C	-10 °F
Max. operating temperature admissible (continuous)	82	°C	180 °F
Coefficient of friction (pulley side / steel driving pulley)	0.30	-	
Coefficient of friction (pulley side / driving pulley with friction cover)	0.40	-	
Coefficient of friction (pulley side / pickled steel slider bed)	0.35	-	
Coefficient of friction (pulley side / phenolic resin slider bed)	0.35	-	
Coefficient of friction (pulley side / stainless steel slider bed)	0.35	-	
Seamless manufacturing width	1829	mm	72.00 <i>tommer</i>
On request other seamless manufacturing width	1524	mm	60 <i>tommer</i>
On request further seamless manufacturing width	1524	mm	60 <i>tommer</i>

Joining related properties

Joining method	
Clipper #1	Master joining method for standard applications
Flexproof 10 x 80	Optional joining method

[Link to JDS:](#)

Joining method		Clipper #1	Flexproof 10 x 80
Pulley diameter (minimum)	mm <i>tommer</i>	76 <i>3.00</i>	76 <i>3.00</i>
Pulley diameter minimum with counter flection	mm <i>tommer</i>	76 <i>3.00</i>	76 <i>3.00</i>
Admissible tensile force per unit of width	N/mm <i>lbf/in</i>	16 <i>92</i>	
Admissible tensile force per unit of width at max. operating temperature	N/mm <i>lbf/in</i>	11 <i>60</i>	
Slider bed suitable		Yes	Yes
Carrying rollers suitable		Yes	Yes
Troughed installation suitable		No	No
Powerturns / curved installations		No	No
Knife-edge (nosebar) suitable		No	No
Metal detector suitable		No	No

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554). Limited representative testing based on a standard configuration is carried out to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not exclusively, when profiles or cleats are used, or if the belt working temperature is close to the limits listed in this document.

Chemical resistance

Link til informasjon om kemisk resistens <https://rims.habasit.com>

Mode of use or conveyance

Horizontal

Calculations

For most applications calculation is not required. Should you still need a calculation: please ask Habasit.

Recommendation

Do not go below initial elongation (epsilon) ~ 0.5%, Install the slack belt and tension until running perfectly under the full belt load

Store spare belts in a cool and dry place and if possible in their original packaging. Protect spare belts from sunlight/UV-radiation/dust/dirt! Check Link for Storage requirements:

["https://tdm.habasit.com/pds/en-us/Storage%20of%20Habasit%20material.pdf"](https://tdm.habasit.com/pds/en-us/Storage%20of%20Habasit%20material.pdf)

No danger and limitation

Group

Sub-Group

Del nummer

PVC Belts

Oil Resistant Belts

H250000600

Ansvarsfraskrivelse

Ansvarsfraskrivelse for produktanvendelse (gælder for ALLE Habasit produkter og nævnt på alle produktdatablade)

Denne ansvarsfraskrivelse gælder for Habasit og firmaer, som er tilknyttet os, samt vores chefer, ansatte, agenter og entreprenører (herefter fælles benævnt HABASIT) for de produkter som omfattes af denne tekst (herefter benævnt produkter). SIKKERHEDSADVARSLER SKAL LÆSES OMHYGGELIGT OG ALLE ANBEFALEDE SIKKERHEDSFORSKRIFTER SKAL FØLGES STRENGT! Følg advarslerne som findes i dette dokument, i Habasits kataloger og i installationsanvisninger og håndbøger. Alle indikationer og al information om applicering, anvendelse og ydelse af produktet er anbefalinger, som kan anses for værende pålidelige, men de er ingen fremstilling, garanti eller ansvarsforpligtigelse med hensyn til fuldstændighed, tolerancer eller egnethed til et bestemt formål. Denne information bygger på laboratoriearbejde med mindre testudstyr, kørt ved normaldrift, hvilket indebærer at den ikke nødvendigvis matcher produkttydelsen ved industriel anvendelse. Ny viden og erfaring kan medføre modificeringer og ændringer inden for en kort periode og uden forudgående varsel.

DISSE PRODUKTER OMFATTES AF HABASITS UDTRYKTE GARANTI, SOM ER DEN ENESTE GÆLDENDE GARANTI OG ERSTATTER ALLE ANDRE EVENTUELLE GARANTIER, UDTRYKTE ELLER UNDERFORSTÅEDE. HABASIT FRASKRIVER SIG ALT ANSVAR FOR ALLE ANDRE GARANTIER, UDTRYKTE ELLER UNDERFORSTÅEDE, INKLUSIVE, DOG UDEN AT BEGRÆNSES DERTIL, UNDERFORSTÅEDE GARANTIER OM SALGBARHED, EGNETHED TIL ET BESTEMT FORMÅL, AT PRODUKTERNE IKKE STRIDER MOD NOGLE REGLER, SAMT GARANTIER SOM FØLGE AF AFTALE, ANVENDELSE ELLER HANDEL. DETTE FORBEHOLD GÆLDER I DEN UDSTRÆKNING SOM LOVEN TILLADER. DA FORUDSÆTNINGERNE FOR ANVENDELSE ER UDEN FOR HABASITS KONTROL, KAN VI IKKE TAGE NOGET ANSVAR FOR DE NÆVNTE PRODUKTERS EGNETHED ELLER PROCESILPASNING. DETTE FORBEHOLD GÆLDER OGSÅ FOR INDIKATIONER FRA PROCESRESULTATER OG OUTPUT.