
HabaSYNC® Timing Belts Covers
N Rubber White

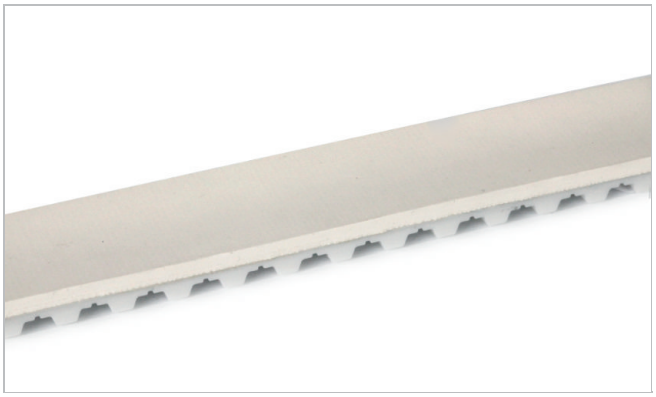

Product Construction / Design	
Material	Natural rubber (NR)

Technical data		
Min. operating temperature admissible (continuous)	-40 °C	*-40 °F*
Max. operating temperature admissible (continuous)	75 °C	*167 °F*

Product code	Thickness		Hardness	Farve	Conveying side surface	Conveying side property	Thickness factor	Food grade[1]
	mm	*tommer*	Shore A					DoC
AC-N-RUBBER WHITE 2MM	2.0	*0.08*	38	Off-white	Smooth	Super-adhesive	20	AC-N-Rubber White
AC-N-RUBBER WHITE 3MM	3.0	*0.12*	38	Off-white	Smooth	Super-adhesive	20	AC-N-Rubber White
AC-N-RUBBER WHITE 4MM	4.0	*0.16*	38	Off-white	Smooth	Super-adhesive	20	AC-N-Rubber White
AC-N-RUBBER WHITE 5MM	5.0	*0.20*	38	Off-white	Smooth	Super-adhesive	20	AC-N-Rubber White
AC-N-RUBBER WHITE 6MM	6.0	*0.24*	38	Off-white	Smooth	Super-adhesive	20	AC-N-Rubber White

[1] This product is in compliance with relevant EU and/or US food contact requirements. Check the following link for detailed information **Documents of Compliance**

Hardness and thickness are statistical values and may vary slightly between different production lots.

The recommended minimum pulley diameter is determined by multiplying the cover thickness by the thickness factor. For design purposes, always use the larger suggested diameter between the belt and the selected cover.

Limited representative testing, based on a standard configuration, is conducted to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not limited to, cases where special customizations are in place, such as profiles or cleats, or when holes, pockets, countersinks, sipes, or similar machining processes are applied.

Not all covers may be available in your local market. Please consult your local Habasit representative.

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554).

HabaSYNC® Timing Belts Covers
N Rubber White

Chemical resistance
Link til informasjon om kemisk resistens https:/rims.habasit.com

Group	HabaSYNC® Timing Belts Covers Elastomer Covers

Ansvarsfraskrivelse
Ansvarsfraskrivelse for produktanvendelse (gælder for ALLE Habasit produkter og nævnt på alle produktdatablade)
Denne ansvarsfraskrivelse gælder for Habasit og firmaer, som er tilknyttet os, samt vores chefer, ansatte, agenter og entreprenører (herefter fælles benævnt HABASIT) for de produkter som omfattes af denne tekst (herefter benævnt produkter). SIKKERHEDSADVARSLER SKAL LÆSES OMHYGGELIGT OG ALLE ANBEFALEDE SIKKERHEDSFORSKRIFTER SKAL FØLGES STRENGT! Følg advarslerne som findes i dette dokument, i Habasits kataloger og i installationsanvisninger og håndbøger. Alle indikationer og al information om applicering, anvendelse og ydelse af produktet er anbefalinger, som kan anses for værende pålidelige, men de er ingen fremstilling, garanti eller ansvarsforpligtigelse med hensyn til fuldstændighed, tolerancer eller egnethed til et bestemt formål. Denne information bygger på laboratoriearbejde med mindre testudstyr, kørt ved normaldrift, hvilket indebærer at den ikke nødvendigvis matcher produktydelsen ved industriel anvendelse. Ny viden og erfaring kan medføre modificeringer og ændringer inden for en kort periode og uden forudgående varsel.
DISSE PRODUKTER OMFATTES AF HABASITS UDTRYKTE GARANTI, SOM ER DEN ENESTE GÆLDENDE GARANTI OG ERSTATTER ALLE ANDRE EVENTUELLE GARANTIER, UDTRYKTE ELLER UNDERFORSTÅEDE. HABASIT FRASKRIVER SIG ALT ANSVAR FOR ALLE ANDRE GARANTIER, UDTRYKTE ELLER UNDERFORSTÅEDE, INKLUSIVE, DOG UDEN AT BEGRÆNSES DERTIL, UNDERFORSTÅEDE GARANTIER OM SALGBARHED, EGNETHED TIL ET BESTEMT FORMÅL, AT PRODUKTERNE IKKE STRIDER MOD NOGLE REGLER, SAMT GARANTIER SOM FØLGE AF AFTALE, ANVENDELSE ELLER HANDEL. DETTE FORBEHOLD GÆLDER I DEN UDSTRÆKNING SOM LOVEN TILLADER. DA FORUDSÆTNINGERNE FOR ANVENDELSE ER UDEN FOR HABASITS KONTROL, KAN VI IKKE TAGE NOGET ANSVAR FOR DE NÆVNTE PRODUKTERS EGNETHED ELLER PROCESTILPASNING. DETTE FORBEHOLD GÆLDER OGSÅ FOR INDIKATIONER FRA PROCESRESULTATER OG OUTPUT.