


HabaCHAIN®

Slat Top 810 (Straight)



Description

- Straight running steel chain
- For side transfer with 881 series radius running chain

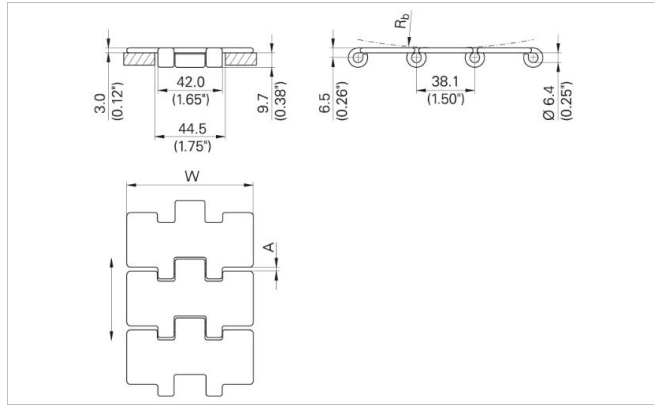

Chain data

Habasit code	Width W		Weight		Nominal tensile strength F_N		R_b		Plate clearance A		Ra	Material
	mm	inch	kg/m	lb/ft	N	lbf	mm	inch	mm	inch	μm	
C0810J0225CSAA	57.1	2.25	2.18	1.46	8500	1913	150.0	5.90	1.6	0.06		CS
C0810K0225SSAA	57.1	2.25	2.18	1.46	5000	1125	150.0	5.90	1.6	0.06	<0.3>	SS
C0810K0225SHAA	57.1	2.25	2.18	1.46	6000	1350	150.0	5.90	1.6	0.06	<0.3>	SH
C0810P0225SAAA	57.1	2.25	2.18	1.46	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA
C0810P0250SAAA	63.5	2.50	2.13	1.42	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA
C0810K0250SSAA	63.5	2.50	2.06	1.38	5000	1125	150.0	5.90	1.6	0.06		SS
C0810K0250SHAA	63.5	2.50	2.09	1.40	6000	1350	150.0	5.90	1.6	0.06		SH
C0810P0263SAAA	66.8	2.63	2.15	1.46	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA
C0810K0263SSAA	66.8	2.63	2.12	1.42	5000	1125	150.0	5.90	1.6	0.06		SS
C0810K0263SHAA	66.8	2.63	2.13	1.43	6000	1125	150.0	5.90	1.6	0.06		SH
C0810J0300CSAA	76.2	3.00	2.37	1.59	8500	1912	150.0	5.90	1.6	0.06		CS
C0810P0300SAAA	76.2	3.00	2.41	1.61	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA
C0810K0300SSAA	76.2	3.00	2.33	1.56	5000	1125	150.0	5.90	1.6	0.06		SS
C0810K0300SHAA	76.2	3.00	2.38	1.59	6000	1350	150.0	5.90	1.6	0.06		SH
C0810J0325CSAA	82.6	3.25	2.65	1.78	8500	1913	150.0	5.90	1.6	0.06		CS
C0810K0325SSAA	82.6	3.25	2.65	1.78	5000	1125	150.0	5.90	1.6	0.06	<0.3>	SS
C0810K0325SHAA	82.6	3.25	2.65	1.78	6000	1350	150.0	5.90	1.6	0.06	<0.3>	SH
C0810P0325SAAA	82.6	3.25	2.65	1.78	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA
C0810K0330SSAA	83.8	3.30	2.67	1.79	5000	1125	150.0	5.90	1.6	0.06		SS
C0810K0330SHAA	83.8	3.30	2.67	1.79	6000	1350	150.0	5.90	1.6	0.06	<0.3>	SH
C0810J0350CSAA	88.9	3.50	2.66	1.78	8500	1912	150.0	5.90	1.6	0.06		CS
C0810P0350SAAA	88.9	3.50	2.13	1.43	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA
C0810K0350SSAA	88.9	3.50	2.66	1.78	5000	1125	150.0	5.90	1.6	0.06		SS
C0810K0350SHAA	88.9	3.50	2.66	1.78	6000	1350	150.0	5.90	1.6	0.06		SH
C0810J0400CSAA	101.6	4.00	3.00	2.02	8500	1913	150.0	5.90	1.6	0.06		CS
C0810K0400SSAA	101.6	4.00	3.00	2.02	5000	1125	150.0	5.90	1.6	0.06	<0.3>	SS
C0810K0400SHAA	101.6	4.00	3.00	2.02	5000	1125	150.0	5.90	1.6	0.06	<0.3>	SH
C0810P0400SAAA	101.6	4.00	3.00	2.02	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA
C0810J0450CSAA	114.3	4.50	3.30	2.22	8500	1913	150.0	5.90	1.6	0.06		CS
C0810K0450SSAA	114.3	4.50	3.30	2.22	5000	1125	150.0	5.90	1.6	0.06	<0.3>	SS
C0810K0450SHAA	114.3	4.50	3.30	2.22	6000	1350	150.0	5.90	1.6	0.06	<0.3>	SH
C0810P0450SAAA	114.3	4.50	3.30	2.22	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA

HabaCHAIN®

Slat Top 810 (Straight)



C0810J0600CSAA	152.4	6.00	4.20	2.82	8500	1913	150.0	5.90	1.6	0.06		CS
C0810K0600SSAA	152.4	6.00	4.20	2.82	5000	1125	150.0	5.90	1.6	0.06	<0.3>	SS
C0810K0600SHAA	152.4	6.00	4.20	2.82	6000	1350	150.0	5.90	1.6	0.06	<0.3>	SH
C0810P0600SAAA	152.4	6.00	4.20	2.82	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA
C0810J0750CSAA	190.5	7.50	5.10	3.43	8500	1913	150.0	5.90	1.6	0.06		CS
C0810K0750SSAA	190.5	7.50	5.10	3.43	5000	1125	150.0	5.90	1.6	0.06	<0.3>	SS
C0810K0750SHAA	190.5	7.50	5.10	3.43	6000	1350	150.0	5.90	1.6	0.06	<0.3>	SH
C0810P0750SAAA	190.5	7.50	5.10	3.43	5500	1238	150.0	5.90	1.6	0.06	<0.5>	SA

Pin material: case hardened carbon steel (for CS chain), stainless steel (for SS, SH and SA chain)

- Standard packaging: 3.048 m = 10ft
- The weight specification is indicative

Related products

- Multi-Hub 820 Sprocket-Rims
- Multi-Hub 820 Idler-Rims
- Multi-Hub Inserts
- Solid sprockets - Series 810
- Solid sprockets - Series 820
- Solid Idler 810

For further information and availability please contact your local Habasit partner.

Disclaimer

Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice.

EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.