


Main application

Live roller drive belt, Power transmission belt

Description

Elastic, Monolithic Belt, Abrasion resistant, Flexibility in all directions, Simple and fast joining method

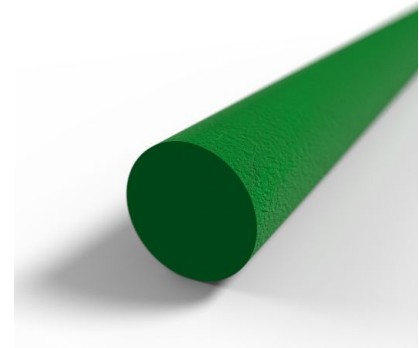

Product data

Technical data	
Material type	TPU Polyester
Hardness	90 ShA
Temperature correction factor	0.85
Min. operating temperature admissible (continuous)	-20 °C
Max. operating temperature admissible (continuous)	50 °C
Coefficient of friction on steel	0.40

Code	Item number	Color	Food grade	Ø		Weight	
				mm	kg/m	lbs/ft	
P-RB02-KG-C600	H010100193	Green	No	2	0.00	0.00	
P-RB03-KG-C300	H010100231	Green	No	3	0.01	0.01	
P-RB03-KG-N600	H950021050	Green	No	3			
P-RB04-KG-N250	H010100156	Green	No	4	0.01	0.01	
P-RB04-KG-N1000	H950021052	Green	No	4			
P-RB05-KG-N250	H010100191	Green	No	5	0.02	0.01	
P-RB05-KG-N500	H950021053	Green	No	5			
P-RB06-KG-N250	H010100324	Green	No	6	0.03	0.02	
P-RB06-KG-N400	H950021054	Green	No	6			
P-RB07-KG-N200	H010100431	Green	No	7	0.05	0.03	
P-RB08-KG-N200	H010100432	Green	No	8	0.06	0.04	
P-RB08-KG-N220	H950021056	Green	No	8			
P-RB09-KG-N200	H010100293	Green	No	9	0.08	0.05	
P-RB10-KG-N100	H010100268	Green	No	10	0.09	0.06	
P-RB12-KG-N100	H010100460	Green	No	12	0.13	0.09	
P-RB15-KG-N50	H010100172	Green	No	15	0.21	0.14	

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554).

Limited representative testing based on a standard configuration is carried out to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not exclusively, when profiles or cleats are used, or if the belt working temperature is close to the limits listed in this document.

Code	Tensile force for 8% elongation (k8% static) (Habasit Standard SOP3-155 / EN ISO 21181):	Tensile force for 8% elongation after relaxation (k8% relaxed) (Habasit Standard SOP3-155 / EN ISO 21181):	Nominal peripheral force	Pulley diameter (minimum)	Minimum pulley diameter running side
	N	N	N	mm	mm
P-RB02-KG-C600	8	6	10	20	20
P-RB03-KG-C300	18	13	23	30	30
P-RB03-KG-N600	18	13	23	30	30
P-RB04-KG-N250	32	24	41	40	40
P-RB04-KG-N1000	32	24	41	40	40
P-RB05-KG-N250	51	37	65	50	50
P-RB05-KG-N500	51	37	65	50	50
P-RB06-KG-N250	73	53	93	60	60
P-RB06-KG-N400	73	53	93	60	60
P-RB07-KG-N200	99	72	127	70	70
P-RB08-KG-N200	129	94	165	80	80
P-RB08-KG-N220	129	94	165	80	80
P-RB09-KG-N200	164	117	209	90	90
P-RB10-KG-N100	202	147	258	100	100
P-RB12-KG-N100	291	212	372	120	120
P-RB15-KG-N50	455	331	582	150	150

Chemical resistance

Link to 'Chemical resistance information': <https://rims.habasit.com>

Disclaimer

Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice. EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.