
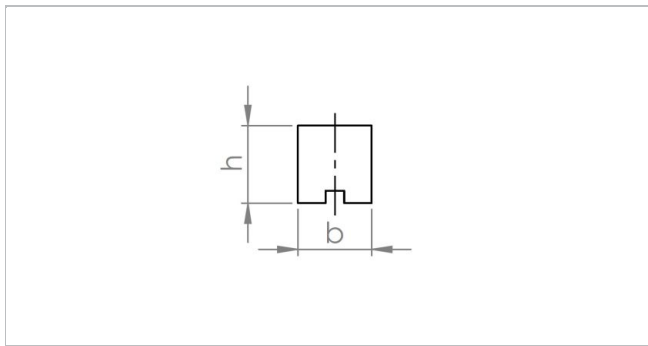


# Rectangular Cleats E-PQ-F

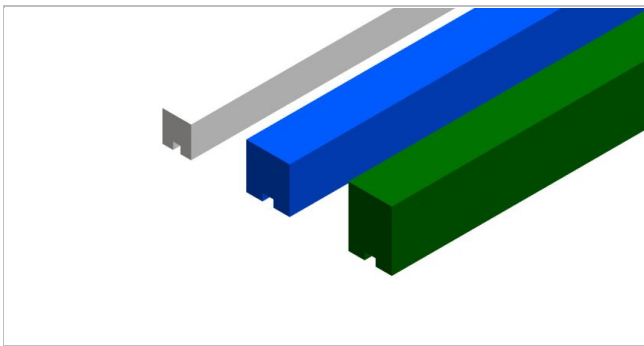

## Product data

Technical data		
Material type	TPU Polyester	
Hardness	85	ShA

Code	Item number	Color	Food grade	DoC Name	b	h	Weight
					mm	mm	kg/m
E-PQ04-FC-C200	H090060140	Cobalt blue	Yes	FC	8.0	4.5	0.03
E-PQ04-FW-B540	H090035105	White	Yes	FW	8.0	4.5	0.03
E-PQ08-FC-B300	H950021279	Cobalt blue	Yes	FC	8.0	8.5	0.08
E-PQ08-FC-C100	H090060153	Cobalt blue	Yes	FC	8.0	8.5	0.08
E-PQ12-FC-B150	H090034824	Cobalt blue	Yes	FC	12.0	12.5	0.17
E-PQ12-FC-C50	H090034823	Cobalt blue	Yes	FC	12.0	12.5	0.17
E-PQ12-FD-B150	S090035503	Dark green	Yes	FD	12.0	12.5	0.17
E-PQ15-FG-C100	H090035218	Green	Yes	FG	11.0	15	0.20
E-PQ04-FW-C200	H090035104	White	Yes	FW	8.0	4.5	0.03
E-PQ08-FG-C100	H090035208	Green	Yes	FG	8.0	8.5	0.08
E-PQ08-FW-C100	H090035108	White	Yes	FW	8.0	8.5	0.08
E-PQ12-FG-C50	H090035212	Green	Yes	FG	12.0	12.5	0.17
E-PQ12-FW-C50	H090035112	White	Yes	FW	12.0	12.5	0.17
E-PQ16-FG-C50	H090035216	Green	Yes	FG	12.0	16.5	0.23
E-PQ16-FW-C50	H090035116	White	Yes	FW	12.0	16.5	0.23
E-PQ08-FG-B300	H090035209	Green	Yes	FG	8.0	8.5	0.08
E-PQ08-FW-B300	H090035109	White	Yes	FW	8.0	8.5	0.08
E-PQ12-FG-B150	H090035213	Green	Yes	FG	12.0	12.5	0.17
E-PQ12-FW-B150	H090035113	White	Yes	FW	12.0	12.5	0.17
E-PQ16-FG-B150	H090035217	Green	Yes	FG	12.0	16.5	0.23
E-PQ16-FW-B150	H090035117	White	Yes	FW	12.0	16.5	0.23

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554).

# Rectangular Cleats

## E-PQ-F



Code	Minimum pulley dia. conveying side transversal	Minimum pulley dia. conveying side longitudinal	Minimum pulley diameter running side
	mm	mm	mm
E-PQ04-FC-C200	50	50	40
E-PQ04-FW-B540	50	50	40
E-PQ08-FC-B300	50	140	110
E-PQ08-FC-C100	50	140	110
E-PQ12-FC-B150	70	170	140
E-PQ12-FC-C50	70	170	140
E-PQ12-FD-B150	70	170	140
E-PQ15-FG-C100	70	220	160
E-PQ04-FW-C200	50	50	40
E-PQ08-FG-C100	50	140	110
E-PQ08-FW-C100	50	140	110
E-PQ12-FG-C50	70	170	140
E-PQ12-FW-C50	70	170	140
E-PQ16-FG-C50	70	220	160
E-PQ16-FW-C50	70	220	160
E-PQ08-FG-B300	50	140	110
E-PQ08-FW-B300	50	140	110
E-PQ12-FG-B150	70	170	140
E-PQ12-FW-B150	70	170	140
E-PQ16-FG-B150	70	220	160
E-PQ16-FW-B150	70	220	160

### Chemical resistance

Link to 'Chemical resistance information': <https://rims.habasit.com>

### Recommendation

General dimensional tolerance:  $\pm 3\%$  or  $\pm 0.20$  mm (whichever is greater).

### Disclaimer

#### Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice. EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.