


Rectangular Cleats E-PQ-R

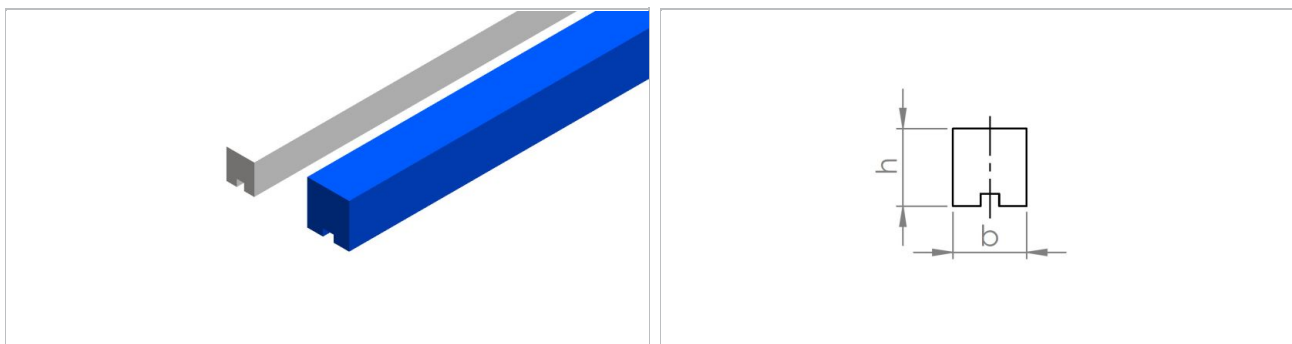

Product data

Technical data		
Material type	PVC	
Hardness	65	ShA

Code	Item number	Color	Food grade	DoC Name	b	h	Weight
					mm	mm	kg/m
E-PQ16-RC-B150	H090034829	Cobalt blue	Yes	RC	12.0	16.5	0.23
E-PQ16-RC-C50	H090060106	Cobalt blue	Yes	RC	12.0	16.5	0.23
E-PQ08-RC-B300	H090034817	Cobalt blue	Yes	RC	8.0	8.5	0.08
E-PQ08-RW-B300	H090034808	White	Yes	RW	8.0	8.5	0.08
E-PQ12-RC-B150	H090034819	Cobalt blue	Yes	RC	12.0	12.5	0.18
E-PQ12-RW-B150	H090034810	White	Yes	RW	12.0	12.5	0.18
E-PQ16-RW-B150	H090060069	White	Yes	RW	12.0	16.5	0.23
E-PQ08-RC-C100	H090034816	Cobalt blue	Yes	RC	8.0	8.5	0.08
E-PQ08-RW-C100	H090034807	White	Yes	RW	8.0	8.5	0.08
E-PQ12-RC-C50	H090034818	Cobalt blue	Yes	RC	12.0	12.5	0.18
E-PQ12-RW-C50	H090034809	White	Yes	RW	12.0	12.5	0.18
E-PQ16-RW-C50	H090060068	White	Yes	RW	12.0	16.5	0.23

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554).

Code	Minimum pulley dia. conveying side transversal	Minimum pulley dia. conveying side longitudinal	Minimum pulley diameter running side
	mm	mm	mm
E-PQ16-RC-B150	70	210	150
E-PQ16-RC-C50	70	210	150
E-PQ08-RC-B300	40	150	80
E-PQ08-RW-B300	40	150	80
E-PQ12-RC-B150	70	190	130
E-PQ12-RW-B150	70	190	130
E-PQ16-RW-B150	70	210	150
E-PQ08-RC-C100	40	150	80
E-PQ08-RW-C100	40	150	80
E-PQ12-RC-C50	70	190	130
E-PQ12-RW-C50	70	190	130
E-PQ16-RW-C50	70	210	150

Chemical resistance

Link to 'Chemical resistance information': <https://rims.habasit.com>

Recommendation

General dimensional tolerance: $\pm 3\%$ or ± 0.20 mm (whichever is greater).

Disclaimer

Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice.

EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.