
# Notched Tracking guides E-PV-F+N



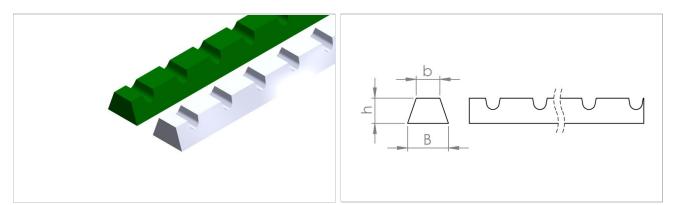

## **Product data**

Technical data		
Material type	TPU Polyester	
Hardness	85	ShA
Geometry option	Notched	

Code	Item number	Color	Food grade	DoC Name	В	b	h	Weight
					mm	mm	mm	kg/m
E-PV13-FG-C100+N	H090035234	Green	Yes	FG	13	7.5	8.4	0.10
E-PV17-FW-C55+N	H090060101	White	Yes	FW	17	10.0	11.4	0.18
E-PV08-FW-C200+N	H090035128	White	Yes	FW	8	5.5	5.2	0.04
E-PV10-FG-C200+N	H090035232	Green	Yes	FG	10	6.0	6.4	0.06
E-PV10-FW-C200+N	H090035132	White	Yes	FW	10	6.0	6.4	0.06
E-PV13-FW-C100+N	H090035135	White	Yes	FW	13	7.5	8.4	0.10
E-PV17-FG-C50+N	H090035239	Green	Yes	FG	17	10.0	11.4	0.18
E-PV17-FW-C50+N	H090035139	White	Yes	FW	17	10.0	11.4	0.18

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554).

Code	Minimum pulley dia. conveying side transversal	Minimum pulley dia. conveying side longitudinal	Minimum pulley diameter running side
	mm	mm	mm
E-PV13-FG-C100+N	80	120	70
E-PV17-FW-C55+N	120	140	100
E-PV08-FW-C200+N	50	80	40
E-PV10-FG-C200+N	50	90	60
E-PV10-FW-C200+N	50	90	60
E-PV13-FW-C100+N	80	120	70
E-PV17-FG-C50+N	120	140	100
E-PV17-FW-C50+N	120	140	100

### **Chemical resistance**

Link to 'Chemical resistance information': https://rims.habasit.com

## Recommendation

General dimensional tolerance:  $\pm 3\%$  or  $\pm 0.20$  mm (whichever is greater).

# Notched Tracking guides E-PV-F+N



#### Disclaimer

Disclaimer Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS) This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice. EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.