

Rectangular Cleats

E-PQ-G




Main applications

Transversally applied on the belt, the profile assists secure product movement in inclined and declined applications. Used in the food processing industry and for material transport in general.

Description

Quadrangular-shaped profile used as a cleat on TPU conveyor and processing belts. Can also be used longitudinally as a lateral barrier, but corrugated sidewalls may be a better solution.

Profiles are applied to the belt surface using a hot air or high frequency welding procedure.

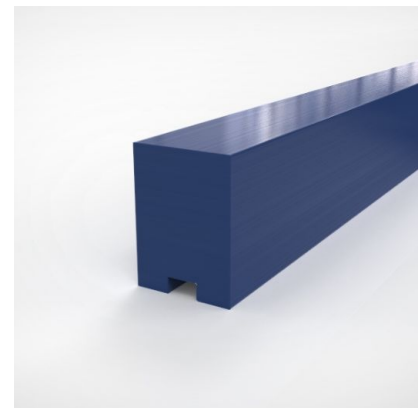

Product data

Technical data											
Material type				TPU Polyether							
Hardness				83 ShA							
Code	Item number	Color	Food grade	DoC Name	Width	Height	Package	Quantity	Units	Box Content	Weight
					mm	mm					kg
E-PQ08-GC-B300	H090035118	Cobalt blue	Yes	GC	8	8	Box	300.0	M	42 bars	0.070
E-PQ08-GW-B300	H090035111	White	Yes	GW	8	8	Box	300.0	M	42 bars	0.070
E-PQ12-GC-B150	H090035120	Cobalt blue	Yes	GC	12	12	Box	150.0	M	63 bars	0.159
E-PQ12-GW-B150	H090035119	White	Yes	GW	12	12	Box	150.0	M	63 bars	0.159
E-PQ16-GC-B150	H090035122	Cobalt blue	Yes	GC	12	16	Box	150.0	M	63 bars	0.207
E-PQ16-GW-B150	H090035121	White	Yes	GW	12	16	Box	150.0	M	63 bars	0.207

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554).

Code	Minimum pulley dia. conveying side transversal	Minimum pulley dia. conveying side longitudinal	Minimum pulley diameter running side
	mm	mm	mm
E-PQ08-GC-B300	50	140	110
E-PQ08-GW-B300	50	140	110
E-PQ12-GC-B150	70	170	140
E-PQ12-GW-B150	70	170	140
E-PQ16-GC-B150	80	220	160
E-PQ16-GW-B150	80	220	160

Chemical resistance

Link to 'Chemical resistance information': <http://www.habasit.com/en/chemical-resistance.htm>

Recommendation

General dimensional tolerance: $\pm 3\%$ or ± 0.20 mm (whichever is greater).

Rectangular Cleats

E-PQ-G



Disclaimer

Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice.

EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.