

Seamless Belts GK3CP 9V/4V-I



Main industry segments


Cable, Molding, Plastic manufacturing

Applications

Cable puller

Special features

Abrasion resistant, Constant coefficient of friction, Constant grip and release property, Dimensionally stable, High grip surface, Low elasticity

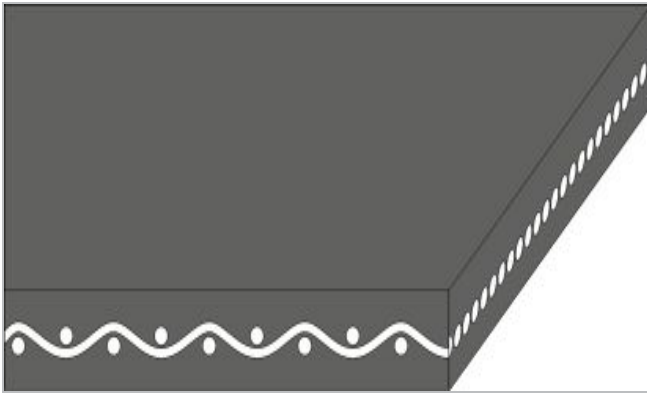

Product Construction / Design	
Pulley side material	Polyvinylchloride (PVC)
Pulley side surface	Smooth
Pulley side property	Adhesive
Pulley side color	Bluish
Traction layer (material)	Polyester (PET)
Number of Fabrics	1
Conveying side material	Polyvinylchloride (PVC)
Conveying side surface	Smooth
Conveying side property	Adhesive
Conveying side color	Bluish

Product characteristics	
Slider bed suitable	No
Carrying rollers suitable	Yes
Antistatically equipped	No
Metal detector suitable	Yes
Food suitability, FDA conformance	No
Food suitability, EU conformance	No

Seamless Belts

GK3CP 9V/4V-I



Technical data		
Thickness of belt	16.4 mm	0.65 inch
Mass of belt (belt weight)	16.0 kg/m ²	3.277 lb/sqft
Pulley diameter (minimum)	100 mm	3.94 inch
Pulley diameter minimum with counter flection	100 mm	3.94 inch
Tensile force for 1% elongation (k1% static) per unit of width (Habasit standard SOP3-155)	32 N/mm	183 lbf/in
Tensile force for 1% elongation after relaxation (k1% relaxed) per unit of width (Habasit Standard SOP3-155 / EN ISO 21181)	10 N/mm	57 lbf/in
Min. operating temperature admissible (continuous)	-10 °C	14 °F
Max. operating temperature admissible (continuous)	70 °C	158 °F
Seamless manufacturing width	1900 mm	75 inch
On request further seamless manufacturing width	480 mm	19 inch

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554).

Chemical resistance

Link to 'Chemical resistance information': <http://www.habasit.com/en/chemical-resistance.htm>

Recommendation

Group	Endless Woven Belts
Sub-Group	Cable Puller Belts
Item number	H800040328
Customs tariff number	59100000

Disclaimer

Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice. EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.