
Gravity Roller Plates
RT102S Series

Description

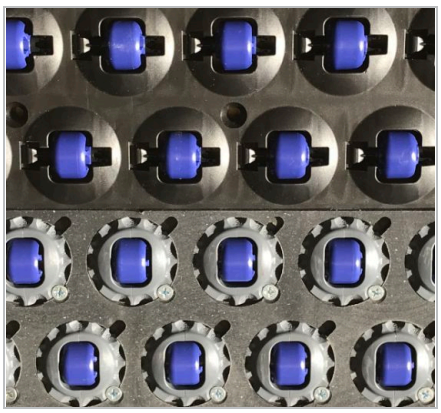

- Rollers position 50.8 mm x 50.8 mm *(2"x 2")* pattern, with offset in direction of travel
- Rollers angle: 0° only for the molded plate type (upper part in picture)
- Rollers angle: 0° to 90° with 15° step increments for machined plate type (lower part in picture)
- Customizable angles of rollers in the same sheet for machined plate type
- The molded roller plate is made of black PP
- The machined roller plate is made of black PE, with gray PP roller housings
- POM low friction blue rollers
- Plated setscrews for housing fixing
- Fast installation (plates will be delivered fully assembled with rollers)

Data for molded plates

Part number	SAP#	Type	Width		Length		Roller angle
			mm	*inch*	mm	*inch*	Degree
RT102SM0381-0304S01	50036729	Molded	381	*15*	305	*12*	0 only

Data for machined plates

Part number	SAP#	Type	Width		Length		Roller angle
			mm	*inch*	mm	*inch*	Degree
RT102SP3048-1219DQS01	tba	Machined	3048	*120*	1219	*48*	0
RT102SP1219-3048DQS01	tba	Machined	1219	*48*	3048	*120*	0
RT102SP1981-0965DQS01	tba	Machined	1981	*78*	965	*38*	0

Conveyed Item and plate configuration

Item type	Roller angle zero		Roller angle 30 degree	
	Item free flow		Item free flow	
	Plate decline angle	Coefficient of friction	Plate decline angle	Coefficient of friction
Rigid	4.5-5.0	0.08-0.09	5.0-6.0	0.09-0.11
Semi rigid	5.0-7.0	0.09-0.12	6.0-8.0	0.11-0.14
Soft	>7.0	>0.12	>8.0	>0.14

Item examples

- Rigid: hard plastic, steel cases
- Semi rigid: cardboard boxes, tires
- Soft: soft sided luggage

Gravity roller plate data with standard roller orientation.
Other sizes, shapes and roller orientation available upon request. Actual plate angle and coefficient of friction values might be different. It is recommended to check the parameters according to the product type, roller orientation and plate descline angle.


Technical specification

Package maximum weight:
- 1000 kg/m² *(200 lb/ft²)*


Gravity roller plate weight:
- 15.2 kg/m² *(3.1 lb/ft²)*

Nota: Tutti i valori sono stati misurati in condizioni climatiche standard: 23°C / 73°F con il 50% di umidità relativa (DIN 50005 / ISO 554).

Gravity Roller Plates
RT102S Series

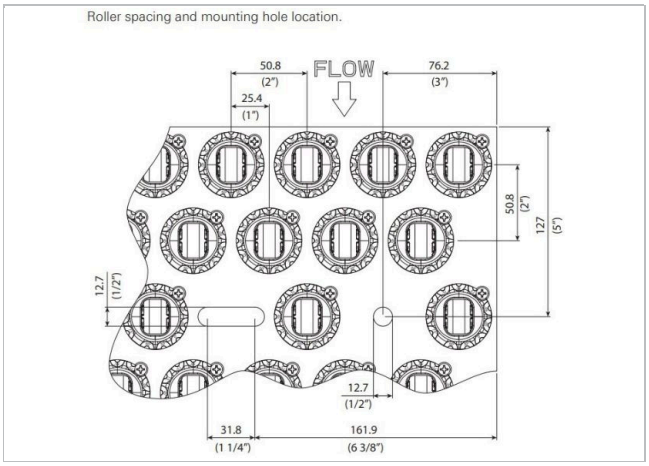

Plan view. Note: Two sets of mounting holes per plate (machined version)

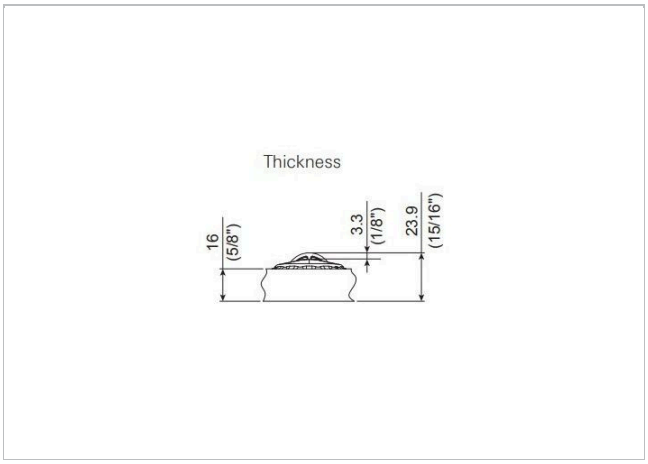

Side view

Esclusione di responsabilità
Esclusione di responsabilità (Disclaimer) relativa a richieste di Schede Dati dei pro-dotti e di altra documentazione di vendita
Questa esclusione di responsabilità viene fatta da e per conto di Habasit e di società affiliate, direttori, dipendenti, agenti e appaltatori della Habasit (d'ora innanzi indicati collettivamente "HABASIT") rispetto ai prodotti citati nel presente documento (i "Prodotti"). LE AVVERTENZE DI SICUREZZA DEVONO ESSERE LETTE CON ATTENZIONE E OGNI PRECAUZIONE RACCOMANDATA CIRCA LA SICUREZZA DEV'ESSERE SEGUITA SCRUPOLOSAMENTE! Leggere le Avvertenze di sicurezza indicate nel presente documento, nel catalogo Habasit e nei manuali d'installazione e d'uso. Ogni indicazione/informazione relativa all'applicazione, all'uso e alle prestazioni dei Prodotti sono raccomandazioni fornite con la dovuta diligenza e cura, ma nessuna dichiarazione o garanzia di alcun tipo viene fatta circa la loro completezza, precisione o idoneità per uno scopo particolare. I dati qui forniti si basano su applicazione di laboratorio con apparecchiature di test a scala ridotta, usate in condizioni standard e non coincidono necessariamente con le prestazioni dei prodotti usati in ambienti industriali. Nuove conoscenze ed esperienze possono portare a nuove valutazioni e modifiche entro un breve periodo di tempo e senza preavviso.
TRANNE I CASI IN CUI HABASIT FORNISCE LE GARANZIE, GARANZIE CHE SONO ESCLUSIVE E SOSTITUTIVE DI OGNI ALTRA GARANZIA ESPLICITA O IMPLICITA, I PRODOTTI SONO FORNITI "COSÌ COME SONO". HABASIT DISCONOSCE OGNI ALTRA GARANZIA ESPLICITA O IMPLICITA, COMPRESA, A SOLO TITOLO DI ESEMPIO, GARANZIA IMPLICITA DI COMMERCIABILITÀ, IDONEITÀ AD UNO SCOPO PARTICOLARE, NON VIOLAZIONE O DERIVANTE DA CONTRATTAZIONE, USO O PRASSI COMMERCIALE; TUTTE QUESTE GARANZIE SONO ESCLUSE NELLA MISURA CONSENTITA DALLE LEGGI APPLICABILI. POICHÉ LE CONDIZIONI D'USO IN APPLICAZIONI INDUSTRIALI ESULANO DAL CONTROLLO DI HABASIT, HABASIT NON SI ASSUME ALCUNA RESPONSABILITÀ CIRCA L'IDONEITÀ E LA CAPACITÀ DI LAVORAZIONE DEI PRODOTTI, COMPRESE LE INDICAZIONI SUI RISULTATI DELLA LAVORAZIONE E DELLA PRODUZIONE.