
Gravity Roller Plates
RT102S Series

Description

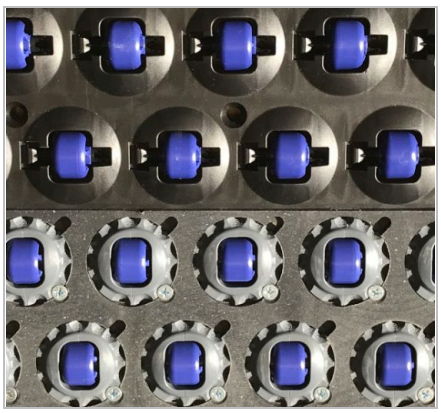

- Rollers position 50.8 mm x 50.8 mm *(2"x 2")* pattern, with offset in direction of travel
- Rollers angle: 0° only for the molded plate type (upper part in picture)
- Rollers angle: 0° to 90° with 15° step increments for machined plate type (lower part in picture)
- Customizable angles of rollers in the same sheet for machined plate type
- The molded roller plate is made of black PP
- The machined roller plate is made of black PE, with gray PP roller housings
- POM low friction blue rollers
- Plated setscrews for housing fixing
- Fast installation (plates will be delivered fully assembled with rollers)

Data for molded plates

Part number	SAP#	Type	Width		Length		Roller angle
			mm	*inch*	mm	*inch*	Degree
RT102SM0381-0304S01	50036729	Molded	381	*15*	305	*12*	0 only

Data for machined plates

Part number	SAP#	Type	Width		Length		Roller angle
			mm	*inch*	mm	*inch*	Degree
RT102SP3048-1219DQS01	tba	Machined	3048	*120*	1219	*48*	0
RT102SP1219-3048DQS01	tba	Machined	1219	*48*	3048	*120*	0
RT102SP1981-0965DQS01	tba	Machined	1981	*78*	965	*38*	0

Conveyed Item and plate configuration

Item type	Roller angle zero		Roller angle 30 degree	
	Item free flow		Item free flow	
	Plate decline angle	Coefficient of friction	Plate decline angle	Coefficient of friction
Rigid	4.5-5.0	0.08-0.09	5.0-6.0	0.09-0.11
Semi rigid	5.0-7.0	0.09-0.12	6.0-8.0	0.11-0.14
Soft	>7.0	>0.12	>8.0	>0.14

Item examples

- Rigid: hard plastic, steel cases
- Semi rigid: cardboard boxes, tires
- Soft: soft sided luggage

Gravity roller plate data with standard roller orientation.
Other sizes, shapes and roller orientation available upon request. Actual plate angle and coefficient of friction values might be different. It is recommended to check the parameters according to the product type, roller orientation and plate descline angle.


Technical specification

Package maximum weight:
- 1000 kg/m² *(200 lb/ft²)*


Gravity roller plate weight:
- 15.2 kg/m² *(3.1 lb/ft²)*

注意： すべてのデータはDIN50005/ISO554に基づく標準温湿度条件（気温23℃、湿度50％）でのおよその数値です。

Gravity Roller Plates
RT102S Series

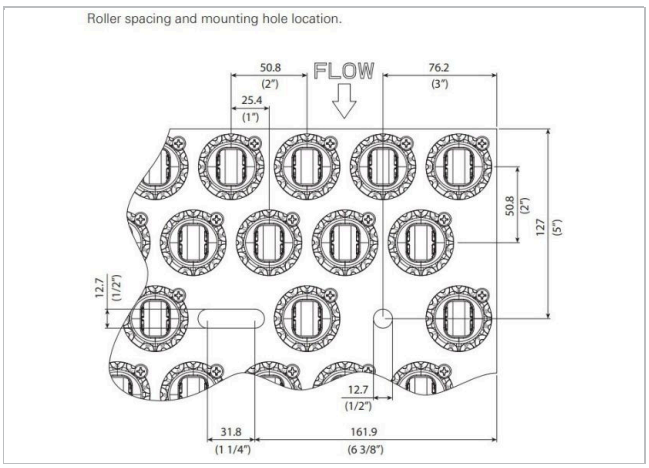

Plan view. Note: Two sets of mounting holes per plate (machined version)

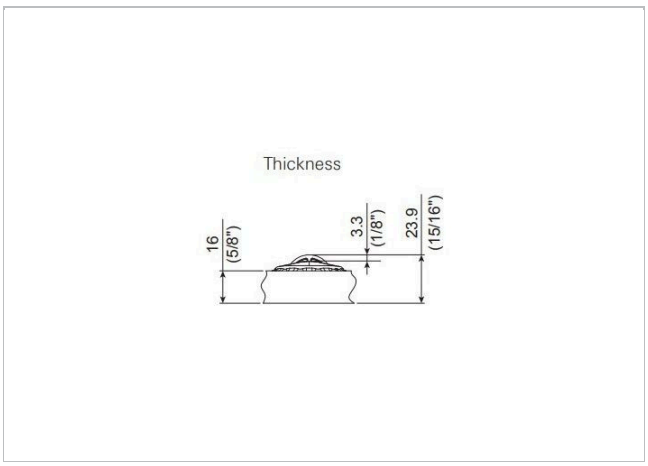

Side view

免責事項
製品の適用に関する免責事項 （全てのハバジット製品に適用され製品データシートに記載されます）
「本免責条項は、本書記載の製品（以下「本製品」といいます。）に関してハバジット社ならびにその関連会社、取締役、従業員、代理人および請負人（以下「ハバジット」と総称します。）にまたはこれらのために適用されます。安全上の警告を注意深く読み、推奨された安全予防措置に厳密に従ってください！設置および操作マニュアルと同時に、本書やハバジット社発行カタログに記載された安全上の警告をご参照ください。本製品の用途、使用方法、性能に関するすべての表示や情報は、しかるべき配慮と注意をもって提示される推奨ですが、本製品の完全性、正確性または特定目的に対する適合性に関していかなる類の表明または保証をするものではありません。ここで示されたデータは、試験室における小規模試験装置を標準条件で稼動させた結果に基づいたものであり、産業用途における製品性能とは必ずしも対応するものではありません。新しい知見および経験により、短期間にまた予告なしに再評価や変更が行われることがあります。
ハバジットによる明示的な保証（当該保証が明示または黙示の他のすべての保証に代わる唯一のものです。）がある場合を除いて、本製品は「現状のまま」提供されます。ハバジットは、明示または黙示のその他一切の保証（商品性、特定目的に対する適合性、権利侵害がないことに対するまたは取引過程、使用方法もしくは商習慣から生じる黙示の保証を含みますが、これらに限られません。）を行うものではありません。これら一切の保証は、適用される法律によって認められる限度において、ここに除外されます。産業用途の使用条件はハバジットが制御できるものではないので、ハバジットは処理実績および作業量に関する表示を含め、本製品の適合性および処理能力に関する責任はこれを一切負いません。」