

Food Belts

A150FBS-W




Only for Habasit America, Habasit Canada Ltd., Habasit East Asia Ltd. - China, Habasit Nippon Co. Ltd. and Habasit Far East Pte. Ltd.

Applications

Packaging belt, Rice grain elevators

Special features

Oil resistant, Temperature variation resistant

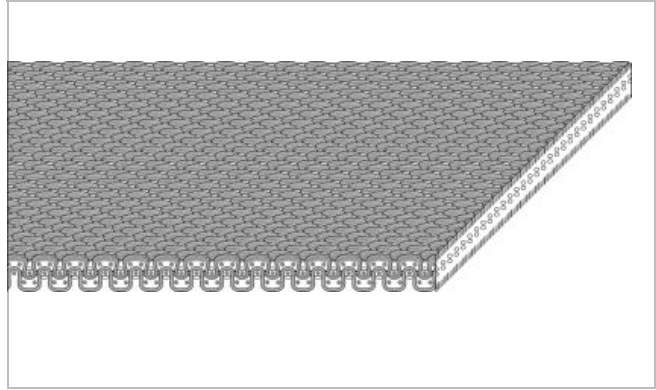

Product Construction / Design	
Conveying side material	Polyester fabric (PET) impregnated with polyvinylchloride (PVC)
Conveying side surface	Fabric
Conveying side property	Non-adhesive
Conveying side color	White
Traction layer (material)	Polyester (PET)
Number of Fabrics	1
Pulley side material	Polyester fabric (PET) impregnated with polyvinylchloride (PVC)
Pulley side surface	Fabric
Pulley side property	Non-adhesive
Pulley side color	White

Product characteristics	
Antistatically equipped	No
Adhesive free joining method	Yes
Flammability	No specific flammability prevention property
Food suitability, FDA conformance	Yes - Check Document of Compliance (DoC) in our Portal
Food suitability, USDA recommendations	No use intended
Food suitability, EU conformance	No
Other conformance/approval	Japanese Food Regulation (MHLW Notification No. 370)

FDA, 21 CFR parts/sections 175.300 Resinous and polymeric coatings, 177.1630 Polyethylene phthalate polymers, 178.3297 Colorants for polymers This product meets the relevant requirements laid down in this regulation and is applicable for direct contact with: - dry food (dry solids with the surface containing no free fat or oil, no end test required) as listed in 21 CFR 176.170 (c) table 1, food type VIII Conditions of use D (hot filled or pasteurized below 150 degF) through G (frozen) as listed in 21 CFR 175.300(d) table 2

Food Belts A150FBS-W



Technical data			
Thickness of belt	3.3	mm	0.13 inch
Mass of belt (belt weight)	3.1	kg/m ²	0.635 lb/sqft
Tensile force for 1% elongation (k1% static) per unit of width (Habasit standard SOP3-155)	35	N/mm	200 lbf/in
Tensile force for 1% elongation after relaxation (k1% relaxed) per unit of width (Habasit Standard SOP3-155 / EN ISO 21181)	12	N/mm	69 lbf/in
Min. operating temperature admissible (continuous)	-23	°C	-10 °F
Max. operating temperature admissible (continuous)	82	°C	180 °F
Coefficient of friction (pulley side / steel driving pulley)	0.30	-	
Coefficient of friction (pulley side / driving pulley with friction cover)	0.40	-	
Coefficient of friction (pulley side / pickled steel slider bed)	0.35	-	
Coefficient of friction (pulley side / phenolic resin slider bed)	0.35	-	
Coefficient of friction (pulley side / stainless steel slider bed)	0.35	-	
Seamless manufacturing width	1829	mm	72.00 inch
On request other seamless manufacturing width	1524	mm	60 inch
On request further seamless manufacturing width	1524	mm	60 inch

Joining related properties

Joining method	
Clipper #1	Master joining method for standard applications
Flexproof 10 x 80	Optional joining method

[Link to JDS:](#)

Joining method		Clipper #1	Flexproof 10 x 80
Pulley diameter (minimum)	mm inch	76 3.00	76 3.00
Pulley diameter minimum with counter flection	mm inch	76 3.00	76 3.00
Admissible tensile force per unit of width	N/mm lbf/in	16 92	
Admissible tensile force per unit of width at max. operating temperature	N/mm lbf/in	11 60	
Slider bed suitable		Yes	Yes
Carrying rollers suitable		Yes	Yes
Troughed installation suitable		No	No
Powerturns / curved installations		No	No
Knife-edge (nosebar) suitable		No	No
Metal detector suitable		No	No

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554). Limited representative testing based on a standard configuration is carried out to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not exclusively, when profiles or cleats are used, or if the belt working temperature is close to the limits listed in this document.

Food Belts A150FBS-W



Chemical resistance

Link to 'Chemical resistance information': <https://rims.habasit.com>

Mode of use or conveyance

Horizontal

Calculations

For most applications calculation is not required. Should you still need a calculation: please ask Habasit.

Recommendation

Do not go below initial elongation (epsilon) ~ 0.5%, Install the slack belt and tension until running perfectly under the full belt load

Store spare belts in a cool and dry place and if possible in their original packaging. Protect spare belts from sunlight/UV-radiation/dust/dirt! Check Link for Storage requirements:

["https://tdm.habasit.com/pds/en-us/Storage%20of%20Habasit%20material.pdf"](https://tdm.habasit.com/pds/en-us/Storage%20of%20Habasit%20material.pdf)

No danger and limitation

Group	PVC Belts
Sub-Group	Oil Resistant Belts
Número de item	H250000600

Esta renúncia é efetuada em nome da Habasit e das suas empresas filiais, diretores, funcionários, agentes e prestadores (adiante coletivamente "HABASIT") no que respeita aos produtos referidos no presente (os "Produtos"). OS AVISOS DE SEGURANÇA DEVEM SER LIDOS CUIDADOSAMENTE E QUAISQUER PRECAUÇÕES DE SEGURANÇA RECOMENDADAS DEVEM SER ESTRITAMENTE SEGUIDAS! Consulte os Avisos de segurança do presente, no catálogo da Habasit, bem como nos manuais de instalação e funcionamento. Todas as indicações/informações relativas à aplicação, utilização e desempenho dos Produtos são recomendações fornecidas com a devida diligência e cuidado, mas não é efetuada qualquer representação ou garantia de qualquer tipo quanto à respetiva integralidade, precisão ou adequação a um fim em particular. Os dados fornecidos no presente são baseados na aplicação de laboratório com equipamento de teste de pequena escala, a funcionar em condições padrão e não correspondem necessariamente ao desempenho do produto em utilização industrial. Novos conhecimentos e experiência poderão levar a reavaliações e modificações num curto espaço de tempo e sem aviso prévio. EXCETO CONFORME EXPLICITAMENTE GARANTIDO PELA HABASIT, CUJAS GARANTIAS SÃO EXCLUSIVAS E SUBSTITUEM TODAS AS OUTRAS GARANTIAS, EXPRESSAS OU IMPLÍCITAS, OS PRODUTOS SÃO FORNECIDOS "TAL QUAL". A HABASIT RENUNCIA A QUAISQUER OUTRAS GARANTIAS, QUER EXPRESSAS OU IMPLÍCITAS, INCLUINDO, MAS NÃO LIMITADO A, GARANTIAS DE COMERCIALIZAÇÃO, ADEQUAÇÃO A UM FIM PARTICULAR, NÃO INFRAÇÃO OU DECORRENTES DE UM CURSO DE NEGOCIAÇÃO, UTILIZAÇÃO OU PRÁTICA DE NEGOCIAÇÃO, TODAS AS QUAIS SÃO PELO PRESENTE EXCLUÍDAS, NA MEDIDA DO PERMITIDO PELA LEI APLICÁVEL. DADO AS CONDIÇÕES DE UTILIZAÇÃO NA APLICAÇÃO INDUSTRIAL ESTAREM FORA DO CONTROLO DA HABASIT, A MESMA NÃO ASSUME QUALQUER RESPONSABILIDADE RELATIVAMENTE À ADEQUAÇÃO E CAPACIDADE