

Food Belts

FAB-5EICH+H15



Due to differing governmental regulations only for use in the USA and Japan

Main industry segments


Baked snacks, Biscuit and Crackers, Bread, Convenience food, Frozen food, Pastry, Primary food packaging, Ready meals

Applications

Saída do forno, Biscuit/Cookie pre-oven applications, Cooling (line) belt, Infeed belt, Outfeed belt

Special features

Antimicrobially equipped, High hydrolysis resistant, Low shrinkage

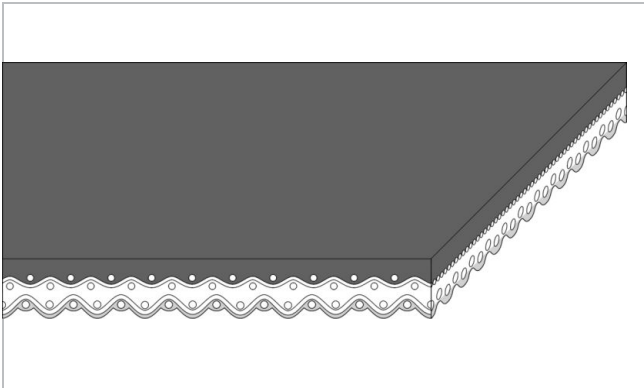

Product Construction / Design	
Conveying side material	Thermoplastic polyurethane (TPU)
Conveying side surface	Matt
Conveying side property	Adhesive
Conveying side color	Cobalt blue
Traction layer (material)	Polyester (PET)
Number of Fabrics	2
Pulley side material	Polyester (PET)
Pulley side surface	Impregnated fabric
Pulley side property	Non-adhesive
Pulley side color	Light blue

Product characteristics	
Antistatically equipped	Yes
Adhesive free joining method	Yes
Flammability	No specific flammability prevention property
Food suitability, FDA conformance	Yes - Check Document of Compliance (DoC) in our Portal
Food suitability, USDA recommendations	No use intended
Food suitability, EU conformance	No
Other conformance/approval	Contains an antimicrobial additive approved by EPA for use with conveyor belts in food contact applications.
	Halal certified

Food Belts

FAB-5EICH+H15



Technical data		
Thickness of belt	1.30 mm	0.05 inch
Mass of belt (belt weight)	1.4 kg/m ²	0.287 lb/sqft
Tensile force for 1% elongation (k1% static) per unit of width (Habasit standard SOP3-155)	6.0 N/mm	34 lbf/in
Tensile force for 1% elongation after relaxation (k1% relaxed) per unit of width (Habasit Standard SOP3-155 / EN ISO 21181)	4.2 N/mm	24 lbf/in
Min. operating temperature admissible (continuous)	-30 °C	-22 °F
Max. operating temperature admissible (continuous)	110 °C	230 °F
Coefficient of friction (pulley side / steel driving pulley)	0.15 -	
Coefficient of friction (pulley side / driving pulley with friction cover)	0.35 -	
Coefficient of friction (pulley side / pickled steel slider bed)	0.20 -	
Coefficient of friction (pulley side / phenolic resin slider bed)	0.20 -	
Coefficient of friction (pulley side / stainless steel slider bed)	0.20 -	
Seamless manufacturing width	2400 mm	94.49 inch

Joining related properties

Joining method	
Flexproof 10 x 80	Master joining method for standard applications

[Link to JDS:](#)

Joining method		Flexproof 10 x 80
Knife-edge (nosebar) radius (minimum)	mm inch	3 0.118
Pulley diameter (minimum)	mm inch	15 0.59
Pulley diameter minimum with counter flection	mm inch	20 0.79
Admissible tensile force per unit of width	N/mm lbf/in	11 63
Admissible tensile force per unit of width at max. operating temperature	N/mm lbf/in	4.4 25
Slider bed suitable		Yes
Carrying rollers suitable		Yes
Troughed installation suitable		No
Powerturns / curved installations		Yes
Low noise applications		No
Metal detector suitable		Yes

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554). Limited representative testing based on a standard configuration is carried out to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not exclusively, when profiles or cleats are used, or if the belt working temperature is close to the limits listed in this document.

Food Belts

FAB-5EICH+H15



Chemical resistance

Link to 'Chemical resistance information': <https://rims.habasit.com>

Mode of use or conveyance

Horizontal, Inclined

Calculations

For most applications calculation is not required. Should you still need a calculation: please ask Habasit.

Recommendation

Do not go below initial elongation (epsilon) ~ 0.3%, Install the slack belt and tension until running perfectly under the full belt load

Store spare belts in a cool and dry place and if possible in their original packaging. Protect spare belts from sunlight/UV-radiation/dust/dirt! Check Link for Storage requirements:

["https://tdm.habasit.com/pds/en-us/Storage%20of%20Habasit%20material.pdf"](https://tdm.habasit.com/pds/en-us/Storage%20of%20Habasit%20material.pdf)

HabaGUARD/HyGUARD belts are restricted for direct food contact applications to use at or below room temperature, HyGUARD is designed to meet USA and Japanese regulations. Compliance with regulations in other countries has to be ensured by the user, The EPA-approved antimicrobial in HyGUARD prevents the growth of microorganisms that could cause spoilage or fouling on the belt surface, This product does not protect users or others against food borne or disease-causing bacteria. Proper cleaning procedures must always be adhered to, This product has not been tested according to ATEX standards (atmospheres with explosion risk - ATEX 95 regulation or EU directive 2014/34/EU) and therefore is subject to user's analysis in the respective environment, Use cleaning agent as prescribed by the machine or cleaning agent manufacturer

Group	TPU Belts
Sub-Group	Antimicrobial Belts (HyGUARD)
Número de item	H950037364

Esta renúncia é efetuada em nome da Habasit e das suas empresas filiais, diretores, funcionários, agentes e prestadores (adiante coletivamente "HABASIT") no que respeita aos produtos referidos no presente (os "Produtos"). OS AVISOS DE SEGURANÇA DEVEM SER LIDOS CUIDADOSAMENTE E QUAISQUER PRECAUÇÕES DE SEGURANÇA RECOMENDADAS DEVEM SER ESTRITAMENTE SÉGUIDAS! Consulte os Avisos de segurança do presente, no catálogo da Habasit, bem como nos manuais de instalação e funcionamento. Todas as indicações/informações relativas à aplicação, utilização e desempenho dos Produtos são recomendações fornecidas com a devida diligência e cuidado, mas não é efetuada qualquer representação ou garantia de qualquer tipo quanto à respetiva integralidade, precisão ou adequação a um fim em particular. Os dados fornecidos no presente são baseados na aplicação de laboratório com equipamento de teste de pequena escala, a funcionar em condições padrão e não correspondem necessariamente ao desempenho do produto em utilização industrial. Novos conhecimentos e experiência poderão levar a reavaliações e modificações num curto espaço de tempo e sem aviso prévio. EXCETO CONFORME EXPLICITAMENTE GARANTIDO PELA HABASIT, CUJAS GARANTIAS SÃO EXCLUSIVAS E SUBSTITUEM TODAS AS OUTRAS GARANTIAS, EXPRESSAS OU IMPLÍCITAS, OS PRODUTOS SÃO FORNECIDOS "TAL QUAL". A HABASIT RENUNCIA A QUAISQUER OUTRAS GARANTIAS, QUER EXPRESSAS OU IMPLÍCITAS, INCLUINDO, MAS NÃO LIMITADO A, GARANTIAS DE COMERCIALIZAÇÃO, ADEQUAÇÃO A UM FIM PARTICULAR, NÃO INFRAÇÃO OU DECORRENTES DE UM CURSO DE NEGOCIAÇÃO, UTILIZAÇÃO OU PRÁTICA DE NEGOCIAÇÃO, TODAS AS QUAIS SÃO PELO PRESENTE EXCLUÍDAS, NA MEDIDA DO PERMITIDO PELA LEI APLICÁVEL. DADO AS CONDIÇÕES DE UTILIZAÇÃO NA APLICAÇÃO INDUSTRIAL ESTAREM FORA DO CONTROLO DA HABASIT, A MESMA NÃO ASSUME QUALQUER RESPONSABILIDADE RELATIVAMENTE À ADEQUAÇÃO E CAPACIDADE