


Main applications

Flat belts are monolithic belts to convey goods in different applications or used as sideskirts. As an alternative they can be used as accessories for fabricated belts (i.e. as special cleats or sidewalls) or cover for timing belts.

Description

Habasit flat belts are produced with smooth or embossed surfaces in TPU, hydrolysis resistant TPU and PVC in different thicknesses from 1.35 mm to 7 mm. Right products have to be selected on the base of the specific application.

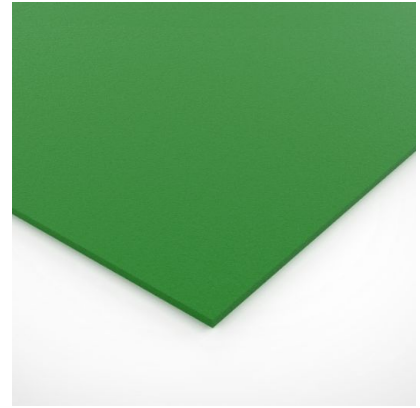

Product data

Technical data	
材質類型	TPU Polyester
Hardness	85 ShA

代碼	項目編號	Color	Food grade	DoC Name	Width			厚度		重量	
					mm	mm	inch	mm	inch	kg/m	lbs/ft
E-FB13-FC-C100	S090060046	Cobalt blue	Yes	FC	270.0	1.35	0.05	0.44	0.29		
E-FB13-FG-C100	S090060040	Green	Yes	FG	270.0	1.35	0.05	0.44	0.29		
E-FB13-FD-C100	S090060042	Dark green	Yes	FD	270.0	1.35	0.05	0.44	0.29		
E-FB13-FW-C100	S090060041	White	Yes	FW	270.0	1.35	0.05	0.44	0.29		
E-FB17-FW-C100	H090060096	White	Yes	FW	270.0	1.7	0.07	0.55	0.37		
E-FB20-FC-C100	H090060079	Cobalt blue	Yes	FC	270.0	2.0	0.08	0.65	0.44		
E-FB20-FT-C100	H090060134	Transparent	Yes	FT	270.0	2.0	0.08	0.65	0.44		
E-FB20-FW-C100	H090060047	White	Yes	FW	270.0	2.0	0.08	0.65	0.44		
E-FB30-FC-C50	H090060080	Cobalt blue	Yes	FC	260.0	3.0	0.12	0.94	0.63		
E-FB30-FT-C50	H090060102	Transparent	Yes	FT	260.0	3.0	0.12	0.94	0.63		
E-FB30-FW-C50	H090060097	White	Yes	FW	260.0	3.0	0.12	0.94	0.63		
E-FB40-FD-C50	H090060129	Dark green	Yes	FD	240.0	4.0	0.16	1.15	0.77		
E-FB40-FW-C50	H090060048	White	Yes	FW	240.0	4.0	0.16	1.15	0.77		
E-FB50-FC-C25	H090060098	Cobalt blue	Yes	FC	240.0	5.0	0.20	1.44	0.97		
E-FB50-FW-C25	H090060049	White	Yes	FW	240.0	5.0	0.20	1.44	0.97		
E-FB50-FW-C50	H090060128	White	Yes	FW	240.0	5.0	0.20	1.44	0.97		

所有数据均为标准气候条件下的粗略值: 23°C/73°F, 相对湿度50% (DIN 50005/ISO 554), 并基于主要接著方式。

Limited representative testing based on a standard configuration is carried out to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not exclusively, when profiles or cleats are used, or if the belt working temperature is close to the limits listed in this document.

抗化學特性

关于“抗化学性信息”的网页：<https://rims.habasit.com>

介绍

General dimensional tolerance: $\pm 3\%$ or ± 0.20 mm (whichever is greater).

声明

产品应用声明(适用于所有哈伯斯特 Habasit 产品及所有产品资料表上提到的)

“这个声明是由哈伯斯特 Habasit 及代表其附属公司、董事、雇员、代理人和承包商(以下统称“HABASIT”)及与本文提到的产品(“产品”)关联。请应仔细阅读安全注意事项,任何建议的安全警告必须严格遵守!请参考此哈伯斯特 Habasit 目录内的“安全警告”,并参考相关安装和操作手册。所有关于应用、产品的使用、产品的性能的指示及数据,皆是尽义务和关注性的建议,只为了推荐用途,对于它们的准确性、其完整性及在特定情况下的适用性,均不可被视为陈述、保证、或承诺。本文提供的数据只是基于实验室工作所在标准环境下使用小型测试工具运作取得,它们不一定与在工业运作中的产品表现相符合。新的知识及经验可能导致我们在短时间内为产品做出必须的修正及变更,我们保留在不做任何通知的情况下,修改及变更相关资料数据的权利。除非HABASIT明确地保证(此保证具独立性、排他性,并取代所有其他的、明示或暗示的保证),否则产品是如购买的实物一样。HABASIT否认所有其他保证,包括明示或暗示但不限于适用性,针对特定用途的适用性,非侵权,或从处理或使用过程中产生的保证,或贸易惯例,所有这一切,兹排除在适用法律允许的范围外。由于产品的使用情况并非在瑞士哈伯斯特及其附属公司可控制的范围内,我们无法对产品的适用性、可靠性、其工作能力、制程结果、产量、制品、潜在缺点、损害、相因而生的损害及深远的损害负任何责任。注:以上一切声明以英文版本的实际内容为准。