
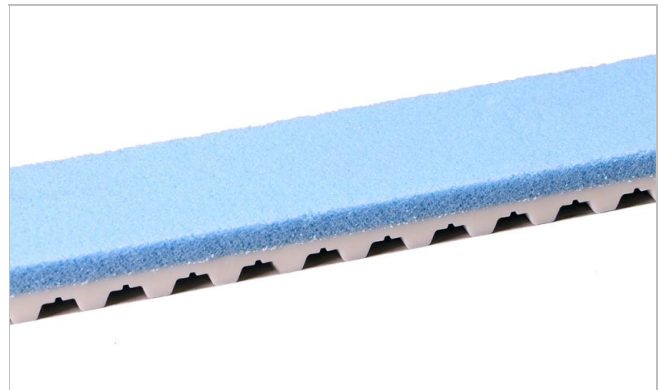


# HabaSYNC® Timing Belts Covers Foam Sylomer®

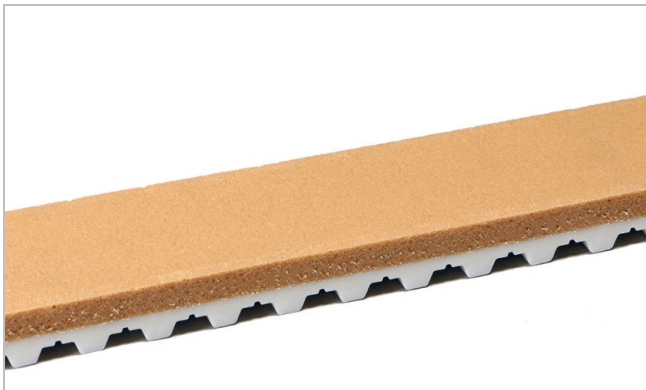

Product Construction / Design	
Material	PU foam

Technical data		
Min. operating temperature admissible (continuous)	-30 °C	-22 °F
Max. operating temperature admissible (continuous)	70 °C	158 °F

Product code	Thickness		Farve	Conveying side surface	Conveying side property	Thickness factor	Food grade <sup>1</sup>	Density of cover:	
	mm	tommer						g/cm <sup>3</sup>	lb/ft <sup>3</sup>
AC-SYLOMER-S-5MM	5.0	0.20	Light blue	Closed-cell structure	Medium-adhesive	15	-	0.22	0.004
AC-SYLOMER-S-10MM	10.0	0.39	Light blue	Closed-cell structure	Medium-adhesive	15	-	0.22	0.004
AC-SYLOMER-S-12MM	12.0	0.47	Light blue	Closed-cell structure	Medium-adhesive	15	-	0.22	0.004
AC-SYLOMER-S-20MM	20.0	0.79	Light blue	Closed-cell structure	Medium-adhesive	15	-	0.22	0.004
AC-SYLOMER-U-5MM	5.0	0.20	Brown	Closed-cell structure	Medium-adhesive	20	-	0.40	0.006
AC-SYLOMER-U-8MM	8.0	0.31	Brown	Closed-cell structure	Medium-adhesive	20	-	0.40	0.006
AC-SYLOMER-U-10MM	10.0	0.39	Brown	Closed-cell structure	Medium-adhesive	20	-	0.40	0.006
AC-SYLOMER-U-12MM	12.0	0.47	Brown	Closed-cell structure	Medium-adhesive	20	-	0.40	0.006
AC-SYLOMER-U-15MM	15.0	0.59	Brown	Closed-cell structure	Medium-adhesive	20	-	0.40	0.006
AC-SYLOMER-V-2MM	2.0	0.08	Light green	Closed-cell structure	Medium-adhesive	15	-	0.30	0.005
AC-SYLOMER-V-3MM	3.0	0.12	Light green	Closed-cell structure	Medium-adhesive	15	-	0.30	0.005
AC-SYLOMER-V-5MM	5.0	0.20	Light green	Closed-cell structure	Medium-adhesive	15	-	0.30	0.005
AC-SYLOMER-V-6MM	6.0	0.24	Light green	Closed-cell structure	Medium-adhesive	15	-	0.30	0.005
AC-SYLOMER-V-8MM	8.0	0.31	Light green	Closed-cell structure	Medium-adhesive	15	-	0.30	0.005
AC-SYLOMER-V-10MM	10.0	0.39	Light green	Closed-cell structure	Medium-adhesive	15	-	0.30	0.005
AC-SYLOMER-V-12MM	12.0	0.47	Light green	Closed-cell structure	Medium-adhesive	15	-	0.30	0.005

# HabaSYNC® Timing Belts Covers Foam Sylomer®



V-12MM			green	structure	adhesive				
AC-SYLOMER-V-15MM	15.0	0.59	Light green	Closed-cell structure	Medium-adhesive	15	-	0.30	0.005
AC-SYLOMER-V-20MM	20.0	0.79	Light green	Closed-cell structure	Medium-adhesive	15	-	0.30	0.005
AC-SYLOMER-Y-5MM	5.0	0.20	Yellow	Closed-cell structure	Medium-adhesive	15	-	0.16	0.003
AC-SYLOMER-Y-10MM	10.0	0.39	Yellow	Closed-cell structure	Medium-adhesive	15	-	0.16	0.003

*Hardness* and *Thickness* are statistical values which may vary slightly in between different production lots.

Recommended minimum pulley diameter is the result of multiplying the cover *Thickness* by the *Thickness factor*. For design purposes, always use the larger suggested diameter of the belt and cover selected. Limited representative testing based on a standard configuration is carried out to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not exclusively, when profiles or cleats are used.

All covers may not be available in your local market. Please consult your local Habasit representative.

*All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554).*

## Chemical resistance

Link til informasjon om kemisk resistens <https://rims.habasit.com>

Group Habasit  
Sub-Group Habasit Timing Belts Covers  
Foam Covers

## Ansvarsfraskrivelse

### Ansvarsfraskrivelse for produktanvendelse (gælder for ALLE Habasit produkter og nævnt på alle produktdatablade)

Denne ansvarsfraskrivelse gælder for Habasit og firmaer, som er tilknyttet os, samt vores chefer, ansatte, agenter og entreprenører (herefter fælles benævnt HABASIT) for de produkter som omfattes af denne tekst (herefter benævnt produkter). SIKKERHEDSADVARSLER SKAL LÆSES OMHYGGELIGT OG ALLE ANBEFALEDE SIKKERHEDSFORSKRIFTER SKAL FØLGES STRENGT! Følg advarslerne som findes i dette dokument, i Habasits kataloger og i installationsanvisninger og håndbøger. Alle indikationer og al information om applicering, anvendelse og ydelse af produktet er anbefalinger, som kan anses for værende pålidelige, men de er ingen fremstilling, garanti eller ansvarsforpligtigelse med hensyn til fuldstændighed, tolerancer eller egnethed til et bestemt formål. Denne information bygger på laboratoriearbejde med mindre testudstyr, kørt ved normaldrift, hvilket indebærer at den ikke nødvendigvis matcher produktionen ved industriel anvendelse. Ny viden og erfaring kan medføre modificeringer og ændringer inden for en kort periode og uden forudgående varsel. DISSE PRODUKTER OMFATTES AF HABASITS UDTRYKTE GARANTI, SOM ER DEN ENESTE GÆLDENDE GARANTI OG ERSTATTER ALLE ANDRE EVENTUELLE GARANTIER, UDTRYKTE ELLER UNDERFORSTÅEDE. HABASIT FRASKRIVER SIG ALT ANSVAR FOR ALLE ANDRE GARANTIER, UDTRYKTE ELLER UNDERFORSTÅEDE, INKLUSIVE, DOG UDEN AT BEGRÆNSES DERTIL, UNDERFORSTÅEDE GARANTIER OM SALGBARHED, EGNETHED TIL ET BESTEMT FORMÅL, AT PRODUKTERNE IKKE STRIDER MOD NOGLE REGLER, SAMT GARANTIER SOM FØLGE AF AFTALE, ANVENDELSE ELLER HANDEL. DETTE FORBEHOLD GÆLDER I DEN UDSTRÆKNING SOM LOVEN TILLADER. DA FORUDSÆTNINGERNE FOR ANVENDELSE ER UDEN FOR HABASITS KONTROL, KAN VI IKKE TAGE NOGET ANSVAR FOR DE NÆVNTE PRODUKTERS EGNETHED ELLER PROCESTILPASNING. DETTE FORBEHOLD GÆLDER OGSÅ FOR INDIKATIONER FRA PROCESRESULTATER OG OUTPUT.