
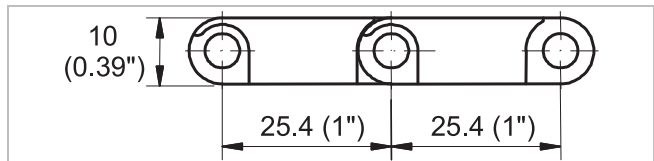


Description

- 0% open area
- High lateral stiffness
- Food approved materials available
- Rod diameter 5 mm (0.2")
- "Open window" sprockets

Available accessories

- Flights
- Side guards
- Hold-down devices
- GripTop modules

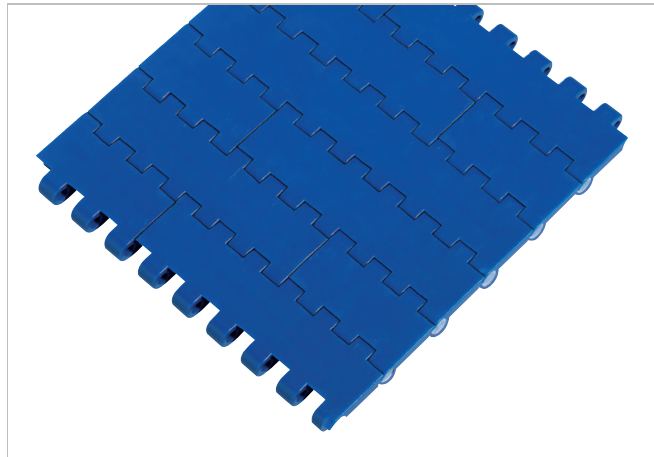

Belt data

Belt material		PE	POM	PA	POM	PP	
Rod material		PE	PA		PP	POM	PP
Nominal tensile strength F'_N straight run	N/m	9000	32000	28000	21500	18000	18000
	lb/ft	616	2192	1918	1473	1233	1233
Temperature range	°C	-70 - 65	-40 - 93	-40 - 130	5 - 93	5 - 93	5 - 105
	°F	-94 - 150	-40 - 200	-40 - 266	40 - 200	40 - 200	40 - 220
Belt weight m_b	kg/m ²	5.8	8.4	7.8	8.4	5.5	5.5
	lb/sqft	1.19	1.71	1.60	1.71	1.13	1.13

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without side guards or hold down devices (minimum)		Backbending radius for elevators with side guards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
50	2.00	50	2.00	100	4	150	6	250.0	10

Use the largest possible backbending radius for elevators with side guards or hold-down devices.

Standard range of belt widths b_b

mm (nom.)	50	100	150	200	250	300	350	400	450	500	550	600	650	700	etc.
inch (nom.)	2	4	6	8	10	12	14	16	18	20	22	24	26	28	etc.

Real belt widths are in most cases 0.1% to 0.3% wider.

For PE material up to 750 mm (30") -3 mm to 1 mm and -0.4% to 0.1% for wider belts.

For PP material up to 750 mm (30") -1 mm to 2 mm and 0% to 0.45% for wider belts.

For POM material up to 750 mm (30") -2 mm to 1 mm and -0.25% to 0.25% for wider belts.

Standard belt widths in increments of 50 mm (2"). Non-standard widths are offered in increments of 16.66 mm (0.66"). Smallest possible width 83.4 mm (3.25"). Non-bricklaid belts 50 mm (2") and 100 mm (4") wide.

For detailed material properties refer to the HabasitLINK® Engineering Guidelines.

The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasitLINK® Engineering Guidelines.

Belt data for special belt materials

Belt material		PA+GF	PA+HT	PBT+FR		ST
Rod material		ST		PA	PP	ST
Sprocket material ⁽¹⁾		ST		Standard		ST
Belt width		see table		Standard		see table
Flammability classification UL 94 ⁽²⁾		HB		V0		
Flammability classification ISO 340 ⁽²⁾		no		yes		
Nominal tensile strength F' _N straight run	N/m	24000	24000	15000	16000	12000
	lb/ft	1644	1644	959	1027	822
Temperature range	°C	0 - 145	0 - 170	-40 - 130	5 - 105	0 - 200
	°F	32 - 293	32 - 338	-40 - 266	40 - 220	32 - 392
Temperature maximum (short-term)	°C	175	200	150		240
	°F	347	392	302		464
Belt weight m _B	kg/m ²	9.0	9.0	8.9	8.9	10.8
	lb/sqft	1.85	1.85	1.82	1.82	2.21

⁽¹⁾ In most cases standard sprockets are suitable. Depending on the application requirements it may be necessary to select a different sprocket material like Polyamide, Polyurethane or Polypropylene. For Polyamide +HT, Polyamide +GF and Super High Temperature belt materials it is recommended to use sprockets of the Super High Temperature material.

⁽²⁾ Flammability classification UL 94 and ISO 340 see Glossary in the HabasitLINK® Engineering Guidelines.

Belt width for Polyamide +GF, Polyamide +HT and Super High Temperature material (ST)

mm (nom.)	50.8	101.7	152.5	203.3	254.2	305.0	355.8	406.7	457.5	508.3	559.2	610.0	etc.
inch (nom.)	2.00	4.00	6.00	8.00	10.01	12.01	14.01	16.01	18.01	20.01	22.02	24.02	etc.

Real belt widths are in most cases 0.1% to 0.3% smaller.

Disclaimer

Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice. EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.