


HabasitLINK® sprockets – 2" pitch belting

MB620 FT, MB620 VT, MB620 TT

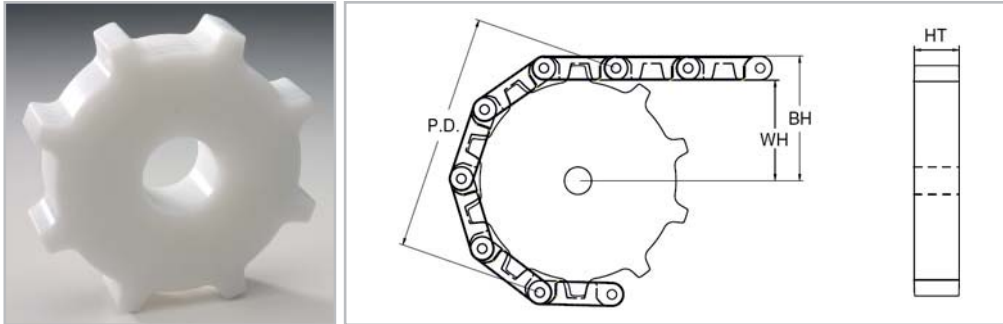

Machined sprocket

Sprocket part number	Number of teeth	(PD) Nominal pitch diameter		(WH) Shaft center to top of wearstrip		(BH) Shaft center to top of belt		(HT) Hub thickness	
		inch	mm	inch	mm	inch	mm	inch	mm
MB72008	8	5.23	133	2.01	51	2.81	71	1.25	32
MB72010	10	6.47	164	2.63	67	3.43	87	1.25	32
MB72012	12	7.73	196	3.26	83	4.06	103	1.25	32
MB72015	15	9.62	244	4.39	111	5.04	128	1.25	32
MB72016	16	10.25	260	4.70	119	5.36	136	1.25	32

Split sprockets and other tooth sizes are available. Standard machined sprocket material is UHMW, Nylon and Urethane are available.

Sprocket part number	Available bore size															
	25 mm	1"	1" sq.	30 mm	1-1/4"	1-7/16"	1-1/2"	1-1/2" sq.	40 mm	40 mm sq.	1-15/16"	50 mm	50 mm sq.	2"	2-1/2" sq.	3-1/2" sq.
MB72008	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	–	–
MB72010	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	–
MB72012	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MB72015	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MB72016	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

All bore sizes are round bore unless designated square (sq.).