

Inclined T-shape Cleats E-PT-G




Main applications

Transversally applied on the belt, the profile assists secure product movement in inclined and declined applications. Mainly used in the food processing industry for bulk material transport.

Description

Slanted T-profile used as a cleat on TPU conveyor and processing belts for inclined and declined transport.

Profiles are applied to the belt surface using a hot air or high frequency welding procedure.

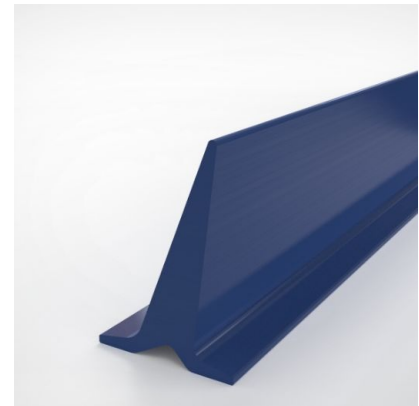

Product data

Technical data											
Material type					TPU Polyether						
Hardness					83 ShA						
Code	Item number	Color	Food grade	DoC Name	Width	Height	Package	Quantity	Units	Box Content	Weight
					mm	mm					kg
E-PT20-GC-B156	H950022347	Cobalt blue	Yes	GC	20	20	Box	156.0	M	65 bars	0.128
E-PT20-GW-B156	H950022357	White	Yes	GW	20	20	Box	156.0	M	65 bars	0.128
E-PT30-GC-B72	H950022348	Cobalt blue	Yes	GC	30	30	Box	72.0	M	30 bars	0.252
E-PT30-GW-B72	H950022358	White	Yes	GW	30	30	Box	72.0	M	30 bars	0.252
E-PT40-GC-B60	H950022349	Cobalt blue	Yes	GC	30	40	Box	60.0	M	25 bars	0.354
E-PT40-GW-B60	H950022359	White	Yes	GW	30	40	Box	60.0	M	25 bars	0.354
E-PT50-GC-B36	H950022350	Cobalt blue	Yes	GC	35	50	Box	36.0	M	15 bars	0.5
E-PT50-GW-B36	H950022360	White	Yes	GW	35	50	Box	36.0	M	15 bars	0.5
E-PT70-GC-B24	H950022351	Cobalt blue	Yes	GC	40	70	Box	24.0	M	10 bars	0.8
E-PT70-GW-B24	H950022361	White	Yes	GW	40	70	Box	24.0	M	10 bars	0.8

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554).

Code	Minimum pulley dia. conveying side transversal
	mm
E-PT20-GC-B156	80
E-PT20-GW-B156	80
E-PT30-GC-B72	90
E-PT30-GW-B72	90
E-PT40-GC-B60	100
E-PT40-GW-B60	100
E-PT50-GC-B36	140
E-PT50-GW-B36	140
E-PT70-GC-B24	170
E-PT70-GW-B24	170

Chemical resistance

Link to 'Chemical resistance information': <http://www.habasit.com/en/chemical-resistance.htm>

Inclined T-shape Cleats E-PT-G



Recommendation

General dimensional tolerance: $\pm 3\%$ or ± 0.20 mm (whichever is greater).

Disclaimer

Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice.

EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.