

Monolithic Flat Belts

CD.F16-N-FC+M/AR



Main industry segments



Baked snacks, Biscuit and Crackers, Candy, Chewing gum, Chocolate

Applications

Weighing belt

Special features

Abrasion resistant, Edges wear resistant, Elastic, Flexibility in all directions, Monolithic Belt, Non fraying, Oil and fat resistant, Small pulley diameter suitable

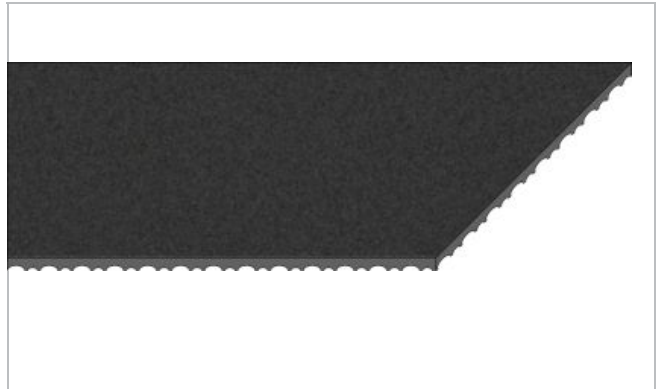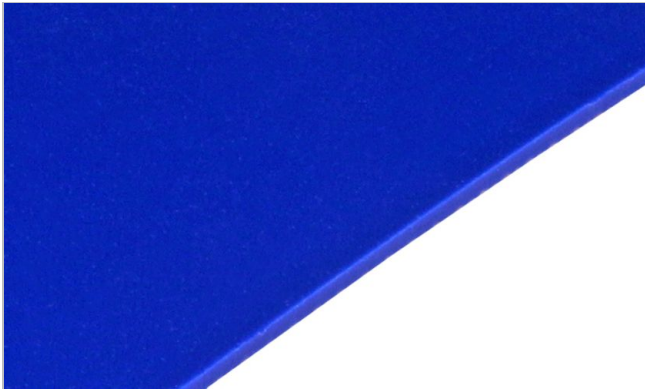

Product Construction / Design	
Material	Thermoplastic polyurethane (TPU)
Farve	Cobalt blue
Conveying side surface	Matt
Conveying side property	Medium-adhesive
Traction layer (material)	No reinforcement
Pulley side surface	Coarse textile structure
Pulley side property	Medium-adhesive

Product characteristics	
Antistatically equipped	No
Knife edge roller suitable	Yes
Antimicrobially equipped	No
Slider bed suitable	Yes
Carrying rollers suitable	Yes
Troughed installation suitable	Yes
X-Ray / Metal detector suitable	Yes
Flammability	No specific flammability prevention property
Food suitability, EU conformance	Yes - Check Document of Compliance (DoC) in our Portal
Food suitability, FDA conformance	Yes - Check Document of Compliance (DoC) in our Portal

Technical data			
Hardness	85	Shore A	
Thickness of belt	1.6	mm	0.063 <i>tommer</i>
Mass of belt (belt weight)	1.3	kg/m ²	0.266 <i>lb/sqft</i>
Tensile force for 1% elongation (k1% static) per unit of width (Habasit standard SOP3-155)	0.25	N/mm	1 <i>lbf/in</i>
Tensile force for 1% elongation after relaxation (k1% relaxed) per unit of width (Habasit Standard SOP3-155 / EN ISO 21181)	0.15	N/mm	1 <i>lbf/in</i>
Min. operating temperature admissible (continuous)	-20	°C	-4 °F
Max. operating temperature admissible (continuous)	60	°C	140 °F
Coefficient of friction (pulley side / steel driving pulley)	0.30	-	
Coefficient of friction (pulley side / stainless steel slider bed)	0.50	-	
Coefficient of friction (pulley side / PE sliding support)	0.35	-	
Seamless manufacturing width	1350	mm	53.15 <i>tommer</i>

Joining related properties

Joining method	
Quickmelt	Master joining method for standard applications
Microflex 15 x 10	Optional joining method
Flexproof 8 x 30	Optional joining method

[Link to JDS:](#)

Joining method		Quickmelt	Microflex 15 x 10	Flexproof 8 x 30
Knife edge roller diameter (minimum)	mm <i>tommer</i>	8 <i>0.315</i>	8 <i>0.315</i>	8 <i>0.315</i>
Pulley diameter (minimum)	mm <i>tommer</i>	15 <i>0.59</i>	15 <i>0.59</i>	15 <i>0.59</i>
Pulley diameter minimum with counter flection	mm <i>tommer</i>	15 <i>0.59</i>	15 <i>0.59</i>	15 <i>0.59</i>
Admissible tensile force per unit of width	N/mm <i>lbf/in</i>	0.75 <i>4</i>	0.80 <i>5</i>	0.80 <i>5</i>
Admissible tensile force per unit of width at max. operating temperature	N/mm <i>lbf/in</i>	0.15 <i>1</i>	0.15 <i>1</i>	0.15 <i>1</i>

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554). Limited representative testing based on a standard configuration is carried out to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not exclusively, when profiles or cleats are used, or if the belt working temperature is close to the limits listed in this document.

Chemical resistance

Link til informasjon om kemisk resistens <https://rims.habasit.com>

Calculations

For most applications calculation is not required. Should you still need a calculation: please ask Habasit.

Recommendation

Do not go below initial elongation (epsilon) ~ 1.0%, Elastic belt: Initial elongation depends on belt load and application

Store spare belts in a cool and dry place and if possible in their original packaging. Protect spare belts from sunlight/UV-radiation/dust/dirt! Check Link for Storage requirements:

["https://tdm.habasit.com/pds/en-us/Storage%20of%20Habasit%20material.pdf"](https://tdm.habasit.com/pds/en-us/Storage%20of%20Habasit%20material.pdf)

This product has not been tested according to ATEX standards (atmospheres with explosion risk - ATEX 95 regulation or EU directive 2014/34/EU) and therefore is subject to user's analysis in the respective environment

Group	Cleandrive Friction Drive
Sub-Group	Monolithic Elastic Flat Belts
Del nummer	H700017778

Ansvarsfraskrivelse

Ansvarsfraskrivelse for produktanvendelse (gælder for ALLE Habasit produkter og nævnt på alle produktdatablade)

Denne ansvarsfraskrivelse gælder for Habasit og firmaer, som er tilknyttet os, samt vores chefer, ansatte, agenter og entreprenører (herefter fælles benævnt HABASIT) for de produkter som omfattes af denne tekst (herefter benævnt produkter). SIKKERHEDSADVARSLER SKAL LÆSES OMHYGGELIGT OG ALLE ANBEFALEDE SIKKERHEDSFORSKRIFTER SKAL FØLGES STRENGT! Følg advarslerne som findes i dette dokument, i Habasits kataloger og i installationsanvisninger og håndbøger. Alle indikationer og al information om applicering, anvendelse og ydelse af produktet er anbefalinger, som kan anses for værende pålidelige, men de er ingen fremstilling, garanti eller ansvarsforpligtigelse med hensyn til fuldstændighed, tolerancer eller egnethed til et bestemt formål. Denne information bygger på laboratoriearbejde med mindre testudstyr, kørt ved normaldrift, hvilket indebærer at den ikke nødvendigvis matcher produktydelsen ved industriel anvendelse. Ny viden og erfaring kan medføre modificeringer og ændringer inden for en kort periode og uden forudgående varsel.

DISSE PRODUKTER OMFATTES AF HABASITS UDTRYKTE GARANTI, SOM ER DEN ENESTE GÆLDENDE GARANTI OG ERSTATTER ALLE ANDRE EVENTUELLE GARANTIER, UDTRYKTE ELLER UNDERFORSTÅEDE. HABASIT FRASKRIVER SIG ALT ANSVAR FOR ALLE ANDRE GARANTIER, UDTRYKTE ELLER UNDERFORSTÅEDE, INKLUSIVE, DOG UDEN AT BEGRÆNSES DERTIL, UNDERFORSTÅEDE GARANTIER OM SALGBARHED, EGNETHED TIL ET BESTEMT FORMÅL, AT PRODUKTERNE IKKE STRIDER MOD NOGLE REGLER, SAMT GARANTIER SOM FØLGE AF AFTALE, ANVENDELSE ELLER HANDEL. DETTE FORBEHOLD GÆLDER I DEN UDSTRÆKNING SOM LOVEN TILLADER, DA FORUDSÆTNINGERNE FOR ANVENDELSE ER UDEN FOR HABASITS KONTROL, KAN VJ IKKE TAGE NOGET ANSVAR FOR DE NÆVNTE PRODUKTERS EGNETHED ELLER PROCESSTILPASNING. DETTE FORBEHOLD GÆLDER OGSÅ FOR INDIKATIONER FRA PROCESRESULTATER OG OUTPUT.