

# Bent Tip Cleats E-PB-F




## Main applications

Transversally applied on the belt, the profile assists secure product movement in steep inclined and declined applications. Mainly used in the food processing industry and for bulk material transport in general.

## Description

Narrow-based cranked T-profile used as a cleat on TPU conveyor and processing belts.

Profiles are applied to the belt surface using high frequency welding procedure.

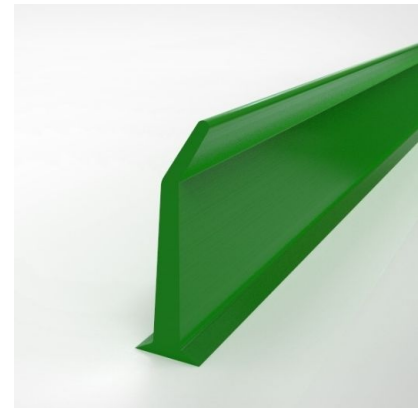

## Product data

Technical data	
Material type	TPU Polyester
Hardness	85 ShA

代碼	項目編號	Color	Food grade	DoC Name	Width	Height	Package	Quantity	Units	Box Content	Weight
					mm	mm					kg
E-PB20-FC-B120	H090060149	Cobalt blue	Yes	FC	12.0	20.0	Box	120	M	50 bars	0.098
E-PB30-FC-B84	H090060150	Cobalt blue	Yes	FC	12.0	30.0	Box	84	M	35 bars	0.138
E-PB40-FC-B60	H090060151	Cobalt blue	Yes	FC	12.0	40.0	Box	60	M	25 bars	0.186
E-PB50-FC-B48	H090060152	Cobalt blue	Yes	FC	12.0	50.0	Box	48	M	20 bars	0.234
E-PB20-FW-B120	H090037280	White	Yes	FW	12.0	20.0	Box	120	M	50 bars	0.098
E-PB30-FW-B84	H090037281	White	Yes	FW	12.0	30.0	Box	84	M	35 bars	0.138
E-PB40-FW-B60	H090037282	White	Yes	FW	12.0	40.0	Box	60	M	25 bars	0.186
E-PB50-FW-B48	H090037283	White	Yes	FW	12.0	50.0	Box	48	M	20 bars	0.234
E-PB20-FD-B120	H090037237	Dark green	Yes	FD	12.0	20.0	Box	120	M	50 bars	0.098
E-PB30-FD-B84	H090037238	Dark green	Yes	FD	12.0	30.0	Box	84	M	35 bars	0.138
E-PB40-FD-B60	H090037239	Dark green	Yes	FD	12.0	40.0	Box	60	M	25 bars	0.186
E-PB50-FD-B48	H090037240	Dark green	Yes	FD	12.0	50.0	Box	48	M	20 bars	0.234

所有数据均为标准气候条件下的粗略值: 23°C/73°F, 相对湿度50% (DIN 50005/ISO 554), 并基于主要接著方式。

Limited representative testing based on a standard configuration is carried out to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not exclusively, when profiles or cleats are used, or if the belt working temperature is close to the limits listed in this document.

代碼	最小滾輪直徑輸送面橫向
	mm
E-PB20-FC-B120	50
E-PB30-FC-B84	50
E-PB40-FC-B60	50
E-PB50-FC-B48	50
E-PB20-FW-B120	50
E-PB30-FW-B84	50
E-PB40-FW-B60	50
E-PB50-FW-B48	50
E-PB20-FD-B120	50
E-PB30-FD-B84	50
E-PB40-FD-B60	50
E-PB50-FD-B48	50

## 抗化學特性

关于“抗化学性信息”的网页：<https://rims.habasit.com>

## 介绍

General dimensional tolerance:  $\pm 3\%$  or  $\pm 0.20$  mm (whichever is greater).

## 声明

### 产品应用声明(适用于所有哈伯斯特 Habasit 产品及所有产品资料表上提到的)

“这个声明是由哈伯斯特 Habasit 及代表其附属公司、董事、雇员、代理人和承包商(以下统称“HABASIT”)及与本文提到的产品(“产品”)关联。请应仔细阅读安全注意事项,任何建议的安全警告必须严格遵守!请参考此哈伯斯特 Habasit 目录内的“安全警告”,并参考相关安装和操作手册。所有关于应用、产品的使用、产品的性能的指示及数据,皆是尽义务和关注性的建议,只为了推荐用途,对于它们的准确性、其完整性及在特定情况下的适用性,均不可被视为陈述、保证、或承诺。本文提供的数据只是基于实验室工作所在标准环境下使用小型测试工具运作取得,它们不一定与在工业运作中的产品表现相符合。新的知识及经验可能导致我们在短时间内为产品做出必须的修正及变更,我们保留在不做任何通知的情况下,修改及变更相关资料数据的权利。除非HABASIT明确地保证(此保证具独立性、排他性,并取代所有其他的、明示或暗示的保证),否则产品是如购买的实物一样。HABASIT否认所有其他保证,包括明示或暗示但不限于适用性,针对特定用途的适用性,非侵权,或从处理或使用过程中产生的保证,或贸易惯例,所有这一切,兹排除在适用法律允许的范围外。由于产品的使用情况并非在瑞士哈伯斯特及其附属公司可控制的范围内,我们无法对产品的适用性、可靠性、其工作能力、制程结果、产量、制品、潜在缺点、损害、相因而生的损害及深远的损害负任何责任。注:以上一切声明以英文版本的实际内容为准。