

HabasitLINK® M5011 Perforated Flat Top 2"





Description

- 18% open area; largest opening 2x10 mm (0.08"x0.4")
- Solid plate
- Open hinge, easy to clean
- Food approved materials available
- Rod diameter 7 mm (0.27")

Available accessories

- Flights and scoops
- Side guards
- Hold-down devices
- GripTop modules

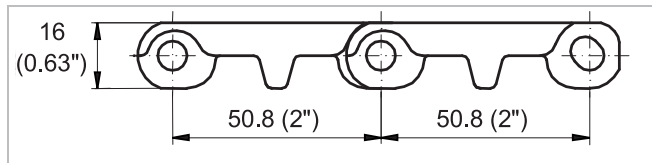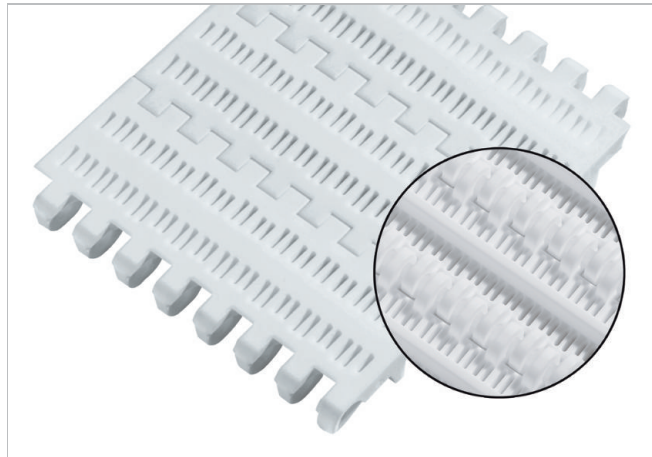

Belt data

Belt material		POM+IM	PE	PP	PE
Rod material		PE	PA		PE
Nominal tensile strength F'_N straight run	N/m	18000	10000	18000	10000
	lb/ft	1233	685	1233	685
Temperature range	°C	-40 - 65	-46 - 65	5 - 105	-70 - 65
	°F	-40 - 150	-50 - 150	40 - 220	-94 - 150
Belt weight m_B	kg/m ²	12.0	8.3	7.8	8.3
	lb/sqft	2.46	1.70	1.60	1.70

Belt material		POM+IM	POM		PP
Rod material		PA		PE	PP
Nominal tensile strength F'_N straight run	N/m	30000	30000	18000	18000
	lb/ft	2055	2055	1233	1233
Temperature range	°C	-40 - 93	-40 - 93	-40 - 65	5 - 105
	°F	-40 - 200	-40 - 200	-40 - 150	40 - 220
Belt weight m_B	kg/m ²	12.0	12.0	12.0	7.8
	lb/sqft	2.46	2.46	2.46	1.60

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without side guards or hold down devices (minimum)		Backbending radius for elevators with side guards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
90	3.50	100	4.00	150	6	150	6	250.0	10

Use the largest possible backbending radius for elevators with side guards or hold-down devices.

HabasitLINK®

M5011 Perforated Flat Top 2"



Standard range of belt widths b_0

mm (nom.)	75	150	225	300	375	450	525	600	675	750	825	900	975	1050	etc.
inch (nom.)	3	6	9	12	15	18	21	24	27	30	33	36	39	42	etc.

Real belt widths are in most cases 0.1% to 0.3% smaller.

For PE material up to 750 mm (30") -3 mm to 1 mm and -0.3% to 0.3% for wider belts.

For PP material up to 750 mm (30") -2 mm to 1 mm and -0.3% to 0.1% for wider belts.

For POM material up to 750 mm (30") -3 mm to 0 mm and -0.4% to 0% for wider belts.

Standard belt widths in increments of 75 mm (3"). Non-standard widths are offered in increments of 18.75 mm (0.74"). Smallest possible width 112.5 mm (4.42"). Non-bricklaid belts 75 mm (3") and 150 mm (6") wide.

For detailed material properties refer to the HabasitLINK® Engineering Guidelines.

The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasitLINK® Engineering Guidelines.

Disclaimer

Product Application Disclaimer (valid for ALL Habasit products and mentioned on all PDS)

This disclaimer is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products"). SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS BE FOLLOWED STRICTLY! Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals. All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice.

EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.