


AFZ-1200 P Flexproof die cutting machine

The AFZ-1200 is a device for preparing (die-cutting) of Habasit belts and tapes up to a width of 1200 mm and a thickness of 8 mm for the Step-Flex (finger over finger only two-ply belts) or Flexproof (finger) joints. It is suitable for all standard Habasit finger geometries with a pitch of 10 or 20 mm. Other geometries can be made with special multiple finger punching heads. Die-cutting operation is pneumatic lateral feed of the punching head is manual by means of an indexed crank drive. A portable version of the machine is available. This can be transported without the supporting structure in a station wagon or van and thus be used for preparing of belts on site. The machine is of "open throat" design i.e. wider belts than 1200 mm can be punched in several steps.

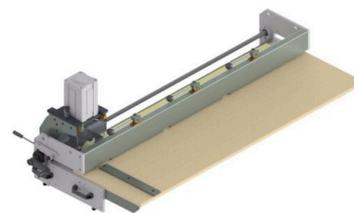

技術データ		
Belt Length Min	250 mm	
Max Belt Thickness	8.0 mm	0.31 inch
Belt Thickness Min	1 mm	
Belt/tape width max.	1250 mm	49 inch
Pneumatics Operating Pressure	6 bar	
Custom Tariff	84798997	

Available versions	製品番号	Power supply
AFZ-1200/P	H080071446	Manual

Available versions	Length	Width	Height
AFZ-1200/P	890 mm (35.039 inch)	1905.0 mm (75.000 inch)	700.0 mm (27.559 inch)

免責事項

製品の適用に関する免責事項 (全てのハバジット製品に適用され製品データシートに記載されます)

「本免責事項は、本書記載の製品(以下「本製品」といいます。)に関してハバジット社ならびにその関連会社、取締役、従業員、代理人および請負人(以下「ハバジット」と総称します。)にまたはこれらのために適用されます。安全上の警告を注意深く読み、推奨された安全予防措置に厳密に従ってください!設置および操作マニュアルと同時に、本書やハバジット社発行カタログに記載された安全上の警告をご参照ください。本製品の用途、使用方法、性能に関するすべての表示や情報は、しかるべき配慮と注意をもって提示される推奨ですが、本製品の完全性、正確性または特定目的に対する適合性に関していかなる類の表明または保証をするものではありません。ここで示されたデータは、試験室における小規模試験装置を標準条件で稼働させた結果に基づいたものであり、産業用途における製品性能とは必ずしも対応するものではありません。新しい知見および経験により、短期間にまた予告なしに再評価や変更が行われることがあります。

ハバジットによる明示的な保証(当該保証が明示または黙示の他のすべての保証に代わる唯一のもので。)がある場合を除いて、本製品は「現状のまま」提供されます。ハバジットは、明示または黙示のその他一切の保証(商品性、特定目的に対する適合性、権利侵害がないことに対するまたは取引過程、使用方法もしくは商習慣から生じる黙示の保証を含みますが、これらに限られません。)を行うものではありません。これら一切の保証は、適用される法律によって認められる限度において、ここに除外されます。産業用途の使用条件はハバジットが制御できるものではないので、ハバジットは処理実績および作業量に関する表示を含め、本製品の適合性および処理能力に関する責任はこれを一切負いません。」