

# Heavy Conveyor Belts A120COS/LSMOR-B



## Main industry segments


Distribution centers, Aplicações de transporte, Various industries

## Applications

Packaging belt, Processing belt

## Special features

Oil resistant, Temperature variation resistant

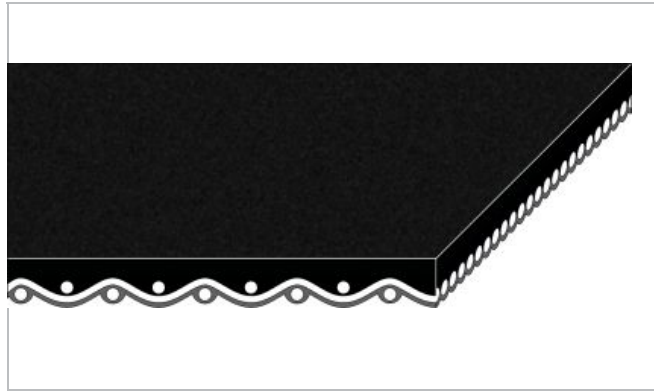

Product Construction / Design	
Conveying side material	Polyvinylchloride (PVC)
Conveying side surface	Smooth
Conveying side property	Adhesive
Conveying side color	Black
Traction layer (material)	Polyester (PET)
Number of Fabrics	1
Pulley side material	Polyester (PET)
Pulley side surface	Impregnated fabric
Pulley side property	Medium-adhesive
Pulley side color	Black

Product characteristics	
Antistatically equipped	No
Adhesive free joining method	Yes
Flammability	No specific flammability prevention property
Food suitability, FDA conformance	No
Food suitability, USDA recommendations	No use intended
Food suitability, EU conformance	No

Technical data		
Thickness of belt	3.3 mm	0.13 inch
Mass of belt (belt weight)	4.5 kg/m <sup>2</sup>	0.930 lb/sqft
Min. operating temperature admissible (continuous)	-23 °C	-10 °F
Max. operating temperature admissible (continuous)	82 °C	180 °F
Coefficient of friction (pulley side / steel driving pulley)	0.35 -	
Seamless manufacturing width	1524 mm	60.00 inch
On request other seamless manufacturing width	1829 mm	72 inch

# Heavy Conveyor Belts

## A120COS/LSMOR-B



### Joining related properties

Joining method	
Clipper #1	Master joining method for standard applications
Flexproof 10 x 80	Optional joining method

[Link to JDS:](#)

Joining method		Clipper #1	Flexproof 10 x 80
Pulley diameter (minimum)	mm <i>inch</i>	76 <i>3.00</i>	76 <i>3.00</i>
Pulley diameter minimum with counter flecion	mm <i>inch</i>		102 <i>4.00</i>
Admissible tensile force per unit of width	N/mm <i>lbf/in</i>	26 <i>150</i>	
Slider bed suitable		Yes	Yes
Carrying rollers suitable		Yes	Yes
Troughed installation suitable		Yes	No
Powerturns / curved installations		No	No
Knife-edge (nosebar) suitable		No	No
Metal detector suitable		Yes	No

*All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554). Limited representative testing based on a standard configuration is carried out to estimate minimum pulley diameters. Please contact Habasit for specific guidance regarding non-standard applications, including, but not exclusively, when profiles or cleats are used, or if the belt working temperature is close to the limits listed in this document.*

# Heavy Conveyor Belts A120COS/LSMOR-B



## Chemical resistance

Link to 'Chemical resistance information': <https://rims.habasit.com>

## Calculations

For most applications calculation is not required. Should you still need a calculation: please ask Habasit.

## Recommendation

Do not go below initial elongation (epsilon) ~ 0.5%, Install the slack belt and tension until running perfectly under the full belt load

- Theoretical pitch of the surface structure in length direction: 81.57 mm (3.211 in). The accuracy is typically in a range of +/- 0.5% whereas the inner layers of a coil have a systematic deviation (longer pitch) compared to the outer layers, No danger and limitation

Group	Woven Belts
Sub-Group	Allveyor General Purpose Belts
Número de item	H2500001649

**Esta renúncia é efetuada em nome da Habasit e das suas empresas filiais**, diretores, funcionários, agentes e prestadores (adiante coletivamente "HABASIT") no que respeita aos produtos referidos no presente (os "Produtos"). OS AVISOS DE SEGURANÇA DEVEM SER LIDOS CUIDADOSAMENTE E QUAISQUER PRECAUÇÕES DE SEGURANÇA RECOMENDADAS DEVEM SER ESTRITAMENTE SEGUIDAS! Consulte os Avisos de segurança do presente, no catálogo da Habasit, bem como nos manuais de instalação e funcionamento. Todas as indicações/informações relativas à aplicação, utilização e desempenho dos Produtos são recomendações fornecidas com a devida diligência e cuidado, mas não é efetuada qualquer representação ou garantia de qualquer tipo quanto à respetiva integralidade, precisão ou adequação a um fim em particular. Os dados fornecidos no presente são baseados na aplicação de laboratório com equipamento de teste de pequena escala, a funcionar em condições padrão e não correspondem necessariamente ao desempenho do produto em utilização industrial. Novos conhecimentos e experiência poderão levar a reavaliações e modificações num curto espaço de tempo e sem aviso prévio. EXCETO CONFORME EXPLICITAMENTE GARANTIDO PELA HABASIT, CUJAS GARANTIAS SÃO EXCLUSIVAS E SUBSTITUEM TODAS AS OUTRAS GARANTIAS, EXPRESSAS OU IMPLÍCITAS, OS PRODUTOS SÃO FORNECIDOS "TAL QUAL". A HABASIT RENUNCIA A QUAISQUER OUTRAS GARANTIAS, QUER EXPRESSAS OU IMPLÍCITAS, INCLUINDO, MAS NÃO LIMITADO A, GARANTIAS DE COMERCIALIZAÇÃO, ADEQUAÇÃO A UM FIM PARTICULAR, NÃO INFRAÇÃO OU DECORRENTES DE UM CURSO DE NEGOCIAÇÃO, UTILIZAÇÃO OU PRÁTICA DE NEGOCIAÇÃO, TODAS AS QUAIS SÃO PELO PRESENTE EXCLUÍDAS, NA MEDIDA DO PERMITIDO PELA LEI APLICÁVEL. DADO AS CONDIÇÕES DE UTILIZAÇÃO NA APLICAÇÃO INDUSTRIAL ESTAREM FORA DO CONTROLO DA HABASIT, A MESMA NÃO ASSUME QUALQUER RESPONSABILIDADE RELATIVAMENTE À ADEQUAÇÃO E CAPACIDADE